

Description


length: 0.801", thread: 10-32 shear, flush reduced head bolt, alloy steel offset cruciform

* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

Additional Information

SKU / Model:	NAS1581F3T7
Minimum Qty (MOQ):	50
NSN:	5305-01-067-3400
ECCN:	EAR99
National Motor Freight:	093486, Bolts,nuts Or Screws, Noi (sub 3)

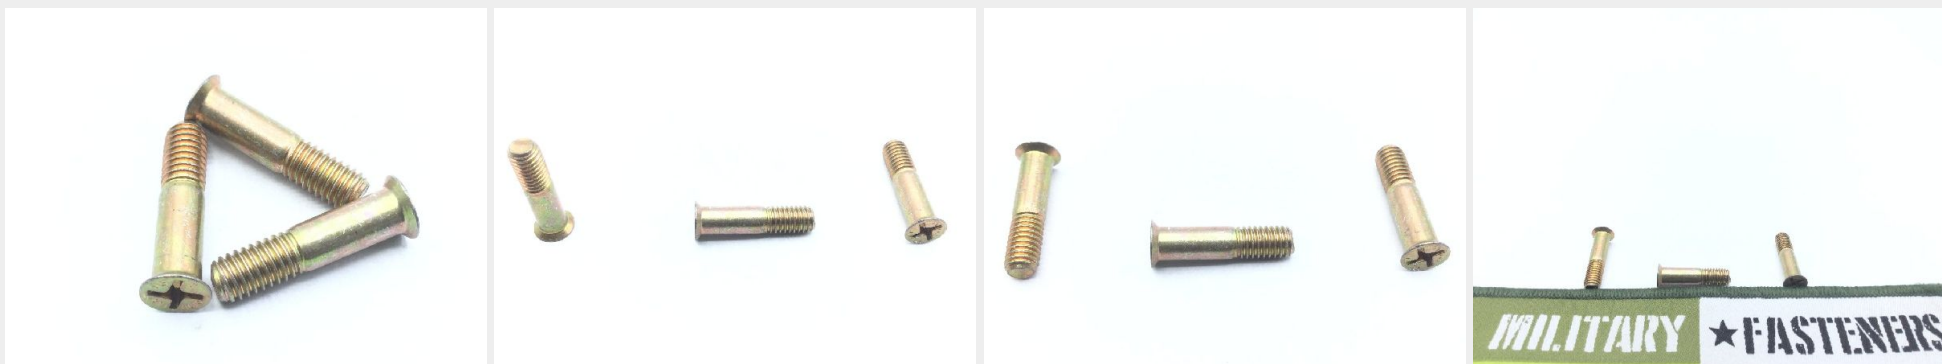

* See page 2 for technical characteristics

P/N NAS1581F3T7 Specifications

Thread Class:	3a
Thread Direction:	Right-hand
Thread Length:	0.338 Inches Minimum And 0.388 Inches Maximum
Fastener Length:	0.786 Inches Minimum And 0.816 Inches Maximum
Head Style:	Flat Countersunk
Head Diameter:	0.258 Inches Minimum And 0.305 Inches Maximum
Grip Diameter:	0.1885 Inches Minimum And 0.1895 Inches Maximum
Internal Drive Style:	Offset Cruciform (torque Set)
Nominal Thread Diameter:	0.190 Inches
Grip Length:	0.428 Inches Minimum And 0.448 Inches Maximum
Thread Quantity Per Inch:	32
Minimum Tensile Strength:	160000 Pounds Per Square Inch
Hardness Rating:	36.0 Rockwell C Minimum Overall And 40.0 Rockwell C Maximum Overall
Countersink Angle:	99.0 Degrees Minimum And 101.0 Degrees Maximum
Surface Finish:	32.0 Microinches Threads
Material:	Steel Comp E4340 Overall Or Steel Comp 4140 Overall Or Steel Comp 4340 Overall Or Steel Comp 6150 Overall Or Steel Comp 8735 Overall Or Steel Comp 8740 Overall
Surface Treatment:	Cadmium Overall And Chromate Overall
Surface Treatment Document And Classification:	Qq-p-416,ty 2,cl 2 Fed Spec Single Treatment Response Overall
Thread Series Designator:	Unjf
Specification/standard Data:	80205-nas1581 Professional/industrial Association Standard

How to Order

Order this close tolerance screw from our inventory online by visiting <https://military-fasteners.com/screws/close+tolerance+screws/NAS1581F3T7> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.