

**Description**



tubing diameter: 5/16", preformed packing o-ring, straight thread tube fitting boss ethylene propylene, phosphate ester resistant

\* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

**Additional Information**

SKU / Model:	NAS16125A
Minimum Qty (MOQ):	50
NSN:	5331-00-086-2461
ECCN:	EAR99
National Motor Freight:	194120, Washers / Gaskets / Pckg Dvcs Noi

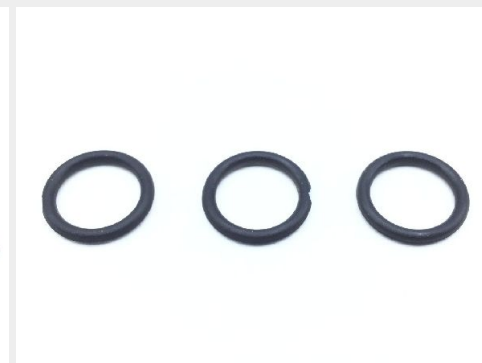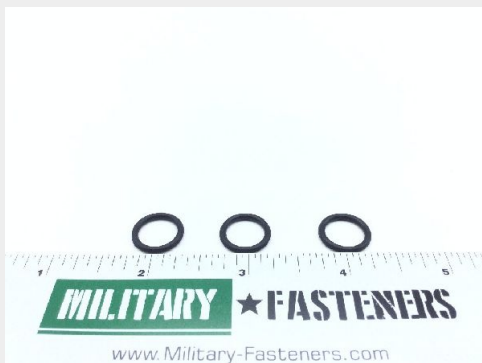

\* See page 2 for technical characteristics

## P/N NAS1612-5A Specifications

<b>Temp Rating:</b>	-65.0 Deg Fahrenheit And 250.0 Deg Fahrenheit
<b>Cross-sectional Height:</b>	0.069 Inches Minimum And 0.075 Inches Maximum
<b>Center Hole Diameter:</b>	0.408 Inches Minimum And 0.419 Inches Maximum
<b>Special Features:</b>	Rubber O-ring
<b>Material:</b>	Rubber Synthetic
<b>Material Document And Classification:</b>	Has1613 National Spec Single Material Response

## How to Order

Order this o-ring from our inventory online by visiting [https://military-fasteners.com/o\\_rings/o\\_rings/NAS1612-5A](https://military-fasteners.com/o_rings/o_rings/NAS1612-5A) and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.