



★ FASTENERS

Military-Fasteners.com

P/N NAS1669-08L11

Description

Fastener Length: 25/32", Head Width: 1/4", Jo-bolt, NAS1669 series rivet

* Manufacturer certifications are shipped with your order FREE of charge


Order this part online

Additional Information

Alternate Part Numbers

[PLT210-5-11](#)

SKU / Model:	NAS166908L11
Minimum Qty (MOQ):	5
NSN:	5320-00-938-6039
Schedule B:	7318.15.8085
ECCN:	EAR99
National Motor Freight:	106510, Rivets I / S Plain / Galvanized Etc

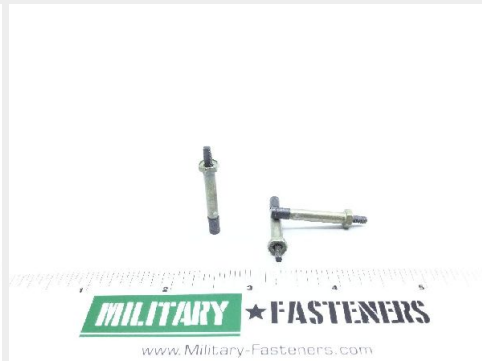

* See page 2 for technical characteristics

P/N NAS1669-08L11 Specifications

Fastener Length:	0.778 Inches Minimum And 0.808 Inches Maximum
Head Style:	Hexagon
Head Height:	0.096 Inches Maximum
Shank Diameter:	0.163 Inches Minimum And 0.165 Inches Maximum
Shank Style:	Threaded Self-plugging Shank W/sleeve
Expansion Device:	Serrated Stem-type W
Grip Length:	0.096 Inches Minimum And 0.657 Inches Maximum
Width Across Flats:	0.244 Inches Minimum And 0.250 Inches Maximum
Hardness Rating:	39.0 Rockwell C Minimum Bolt And 43.0 Rockwell C Maximum Bolt
Hardness Rating:	39.0 Rockwell C Minimum Nut And 43.0 Rockwell C Maximum Nut
Shear Strength:	3355 Double Pounds Per Square Inch
Material:	Steel Comp 4140 Bolt Or Steel Comp 8740 Bolt Or Steel Comp 4130 Bolt
Material:	Steel Comp 4140 Nut Or Steel Comp 8740 Nut Or Steel Comp 4130 Nut
Material:	Steel Comp 304 Sleeve Or Steel Comp 303f Sleeve Or Steel Comp 303 Sleeve
Material Document And Classification:	Mil-s-5626 Mil Spec 1st Material Response Bolt Or Mil-s-6049 Mil Spec 2nd Material Response Bolt Or Mil-s-6758 Mil Spec 3rd Material Response Bolt
Material Document And Classification:	Mil-s-5626 Mil Spec 1st Material Response Nut Or Mil-s-6049 Mil Spec 2nd Material Response Nut Or Mil-s-6758 Mil Spec 3rd Material Response Nut
Material Document And Classification:	Qq-s-763 Fed Spec 1st Material Response Sleeve Or Ams 5639 Assn Std 1st Material Response Sleeve Or Ams 5614 Assn Std 2nd Material Response Sleeve Or Amstm A582 Assn Std 3rd Material Response Sleeve
Surface Treatment:	Cadmium Bolt And Chromate Bolt
Surface Treatment:	Cadmium Nut And Chromate Nut
Surface Treatment:	Cadmium Sleeve And Passivate Sleeve
Surface Treatment Document And Classification:	Qq-p-416,ty 2,cl 2 Fed Spec 1st Treatment Response Sleeve And Qq-p-35 Fed Spec 2nd Treatment Response Sleeve
Surface Treatment Document And Classification:	Qq-p-416,ty 2,cl 2 Fed Spec Single Treatment Response Nut
Surface Treatment Document And Classification:	Qq-p-416,ty 2,cl2 Fed Spec Single Treatment Response Bolt
Specification/standard Data:	80205-nas1669 Professional/industrial Association Standard

How to Order

Order this blind rivet from our inventory online by visiting <https://military-fasteners.com/rivets/blind+rivets/NAS1669-08L11> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.