

**Description**


grip range: 0.407" - 0.469", diameter: 0.164", general purpose rivet, protruding head internally threaded, external sleeve, NAS1669 series rivet

\* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

**Additional Information**

|                         |   |
|-------------------------|---|
| SKU / Model:            | NAS166908L7                                 |
| Minimum Qty (MOQ):      | 10  |
| NSN:                    | 5320-00-196-4688                            |
| Schedule B:             | 7318.15.8085                                |
| ECCN:                   | EAR99                                       |
| National Motor Freight: | 106510, Rivets I / S Plain / Galvanized Etc |

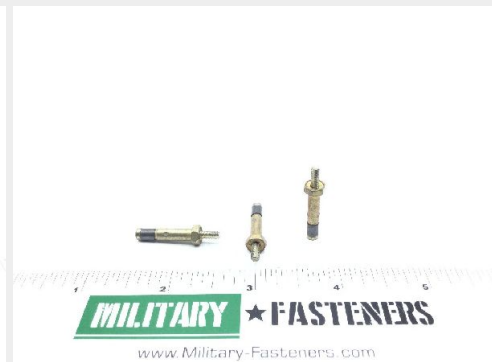

\* See page 2 for technical characteristics

# P/N NAS1669-08L7 Specifications

|   |   |
|---|---|
| <b>Fastener Length:</b>                               | 0.528 Inches Minimum And 0.558 Inches Maximum   |
| <b>Head Style:</b>                                    | Hexagon   |
| <b>Head Height:</b>                                   | 0.096 Inches Maximum  |
| <b>Shank Diameter:</b>                                | 0.163 Inches Minimum And 0.165 Inches Maximum   |
| <b>Shank Style:</b>                                   | Threaded Self-plugging Shank W/sleeve   |
| <b>Expansion Device:</b>                              | Serrated Stem-type W  |
| <b>Grip Length:</b>                                   | 0.407 Inches Minimum And 0.469 Inches Maximum   |
| <b>Width Across Flats:</b>                            | 0.244 Inches Minimum And 0.250 Inches Maximum   |
| <b>Hardness Rating:</b>                               | 39.0 Rockwell C Minimum Bolt And 43.0 Rockwell C Maximum Bolt   |
| <b>Hardness Rating:</b>                               | 39.0 Rockwell C Minimum Nut And 43.0 Rockwell C Maximum Nut   |
| <b>Shear Strength:</b>                                | 3355 Double Pounds Per Square Inch  |
| <b>Material:</b>                                      | Steel Comp 4140 Bolt Or Steel Comp 8740 Bolt Or Steel Comp 4130 Bolt  |
| <b>Material:</b>                                      | Steel Comp 4140 Nut Or Steel Comp 8740 Nut Or Steel Comp 4130 Nut   |
| <b>Material:</b>                                      | Steel Comp 304 Sleeve Or Steel Comp 303f Sleeve Or Steel Comp 303 Sleeve  |
| <b>Material Document And Classification:</b>          | Mil-s-5626 Mil Spec 1st Material Response Bolt Or Mil-s-6049 Mil Spec 2nd Material Response Bolt Or Mil-s-6758 Mil Spec 3rd Material Response Bolt  |
| <b>Material Document And Classification:</b>          | Mil-s-5626 Mil Spec 1st Material Response Nut Or Mil-s-6049 Mil Spec 2nd Material Response Nut Or Mil-s-6758 Mil Spec 3rd Material Response Nut   |
| <b>Material Document And Classification:</b>          | Qq-s-763 Fed Spec 1st Material Response Sleeve Or Ams 5639 Assn Std 1st Material Response Sleeve Or Ams 5641 Assn Std 2nd Material Response Sleeve Or Astm A582 Assn Std 3rd Material Response Sleeve |
| <b>Surface Treatment:</b>                             | Cadmium Bolt And Chromate Bolt  |
| <b>Surface Treatment:</b>                             | Cadmium Nut And Chromate Nut  |
| <b>Surface Treatment:</b>                             | Cadmium Sleeve And Chromate Sleeve And Passivate Sleeve   |
| <b>Surface Treatment Document And Classification:</b> | Qq-p-416,ty 2,cl 2 Fed Spec 1st Treatment Response Sleeve And Qq-p-35 Fed Spec 2nd Treatment Response Sleeve  |
| <b>Surface Treatment Document And Classification:</b> | Qq-p-416,ty 2,cl 2 Fed Spec Single Treatment Response Bolt  |
| <b>Surface Treatment Document And Classification:</b> | Qq-p-416,ty 2,cl 3 Fed Spec Single Treatment Response Nut   |
| <b>Specification/standard Data:</b>                   | 80205-nas1669 Professional/Industrial Association Standard  |

## How to Order

Order this blind rivet from our inventory online by visiting <https://military-fasteners.com/rivets/blind+rivets/NAS1669-08L7> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.