

**Description**


grip range: 0.282" - 0.344", diameter: 0.164", general purpose rivet, flush head, internally threaded, external sleeve, NAS1670 series rivet

\* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

**Additional Information**

SKU / Model:	NAS167008L5
Minimum Qty (MOQ):	10
NSN:	5320-01-407-6237
Schedule B:	7318.15.8085
ECCN:	EAR99
National Motor Freight:	096320, Rivets I / S Nickel Plated Buffed

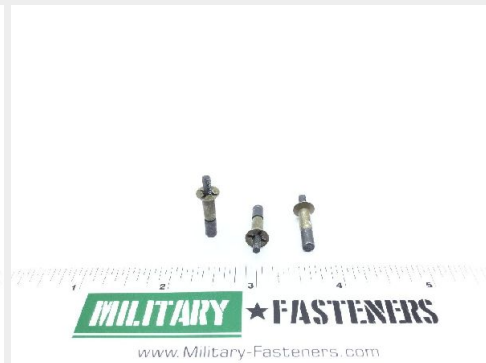

\* See page 2 for technical characteristics

## P/N NAS1670-08L5 Specifications

<b>Head Style:</b>	Flush (flat) Countersunk (included Angle - Less Than 135 Deg W Or W/o Chamfer)
<b>Shank Diameter:</b>	0.1625 Inches Minimum And 0.1645 Inches Maximum
<b>Head Major Diameter:</b>	0.325 Inches Minimum And 0.332 Inches Maximum
<b>Expansion Device:</b>	Knob Stem-type K
<b>Grip Length:</b>	0.282 Inches Minimum And 0.344 Inches Maximum
<b>Countersink Angle:</b>	99.0 Degrees Minimum And 101.0 Degrees Maximum
<b>Material:</b>	Steel Comp 4140 Nut
<b>Material:</b>	Steel Comp 4140 Overall Or Steel Comp 8740 Overall
<b>Material:</b>	Steel Comp 304 Sleeve
<b>Material Document And Classification:</b>	Mil-s-5626 Mil Spec Single Material Response Nut
<b>Material Document And Classification:</b>	Mil-s-5626 Mil Spec Single Material Response Overall
<b>Material Document And Classification:</b>	Qq-s-763 Fed Spec Single Material Response Sleeve
<b>Surface Treatment:</b>	Cadmium Overall And Chromate Overall

## How to Order

Order this blind rivet from our inventory online by visiting <https://military-fasteners.com/rivets/blind+rivets/NAS1670-08L5> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.