

**Description**


grip range: 0.407" - 0.469", diameter: 0.164", general purpose rivet, flush head, internally threaded, external sleeve, NAS1670 series rivet

\* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

**Additional Information**

SKU / Model:	NAS167008L7
Minimum Qty (MOQ):	5
NSN:	5320-00-801-1814
Schedule B:	7318.15.8085
ECCN:	EAR99
National Motor Freight:	106510, Rivets I / S Plain / Galvanized Etc

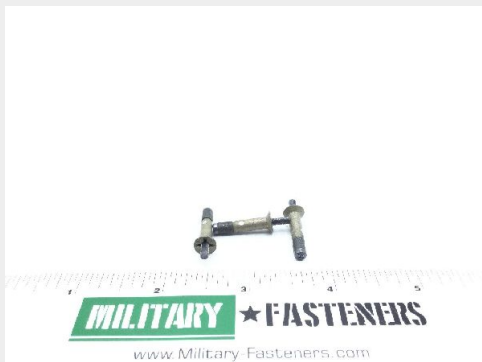

## P/N NAS1670-08L7 Specifications

<b>Fastener Length:</b>	0.528 Inches Minimum And 0.558 Inches Maximum
<b>Head Style:</b>	Flush (flat) Countersunk (included Angle - Less Than 135 Deg W Or W/o Chamfer)
<b>Shank Diameter:</b>	0.163 Inches Minimum And 0.165 Inches Maximum
<b>Shank Style:</b>	Threaded Self-plugging Shank W/sleeve
<b>Head Major Diameter:</b>	0.325 Inches Minimum And 0.332 Inches Maximum
<b>Expansion Device:</b>	Threaded Mandrel
<b>Grip Length:</b>	0.407 Inches Minimum And 0.469 Inches Maximum
<b>Countersink Angle:</b>	99.0 Degrees Minimum And 101.0 Degrees Maximum
<b>Material:</b>	Steel Corrosion Resisting Body
<b>Material:</b>	Steel Sleeve
<b>Material:</b>	Steel Stem
<b>Surface Treatment:</b>	Cadmium Overall
<b>Specification/standard Data:</b>	80205-nas1670 Professional/Industrial Association Standard

## How to Order

Order this blind rivet from our inventory online by visiting <https://military-fasteners.com/rivets/blind+rivets/NAS1670-08L7> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.