



★ FASTENERS

Military-Fasteners.com

P/N NAS1670-08L8

Description



grip range: 0.47" - 0.531", diameter: 0.164", general purpose rivet, flush head, internally threaded, external sleeve, NAS1670 series rivet

* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

Additional Information

SKU / Model:	NAS167008L8
Minimum Qty (MOQ):	10
NSN:	5320-00-801-1815
Schedule B:	7318.15.8085
ECCN:	EAR99
National Motor Freight:	106510, Rivets I / S Plain / Galvanized Etc

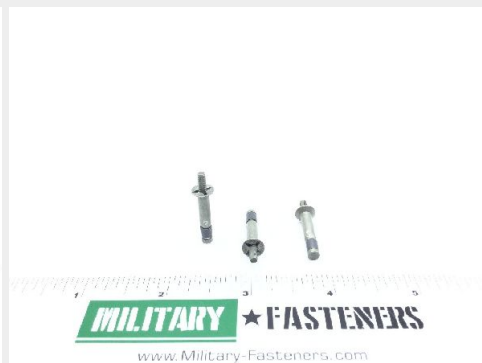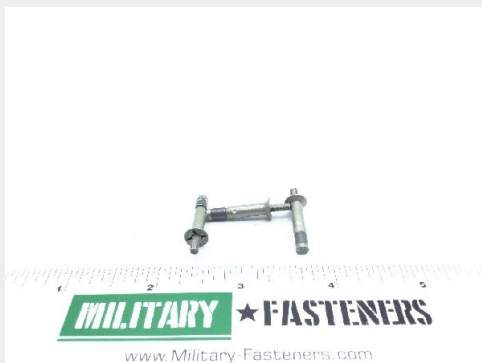

* See page 2 for technical characteristics

P/N NAS1670-08L8 Specifications

Fastener Length:	0.590 Inches Minimum And 0.620 Inches Maximum
Head Style:	Flush (flat) Countersunk (included Angle - Less Than 135 Deg W Or W/o Chamfer)
Shank Diameter:	0.163 Inches Minimum And 0.165 Inches Maximum
Shank Style:	Threaded Self-plugging Shank W/sleeve
Head Major Diameter:	0.325 Inches Minimum And 0.332 Inches Maximum
Expansion Device:	Serrated Stem-type W
Grip Length:	0.470 Inches Minimum And 0.531 Inches Maximum
Countersink Angle:	99.0 Degrees Minimum And 101.0 Degrees Maximum
Material:	Steel Corrosion Resisting Body
Material:	Steel Sleeve
Material:	Steel Stem
Surface Treatment:	Cadmium Overall

How to Order

Order this blind rivet from our inventory online by visiting <https://military-fasteners.com/rivets/blind+rivets/NAS1670-08L8> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.