

Description


NAS1720 series rivet

* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

Additional Information

| | |
|--------------------|------------------|
| SKU / Model: | NAS1720H4L2A |
| Minimum Qty (MOQ): | 20 |
| NSN: | 5320-01-506-4072 |
| Schedule B: | 7616.10.3000 |
| ECCN: | EAR99 |

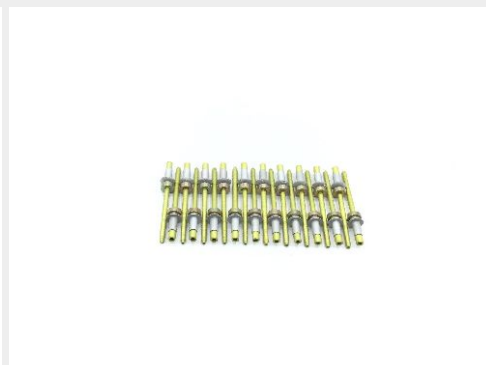

* See page 2 for technical characteristics

P/N NAS1720H4L2A Specifications

| | |
|-----------------------------|---|
| Fastener Length: | 0.263 Inches Maximum |
| Head Style: | Universal |
| Head Height: | 0.049 Inches Minimum And 0.059 Inches Maximum |
| Shank Diameter: | 0.125 Inches Nominal |
| Shank Style: | Self-plugging Mechanically Locked Stem |
| Head Major Diameter: | 0.245 Inches Minimum And 0.255 Inches Maximum |
| Expansion Device: | Serrated Stem-type W |
| Grip Length: | 0.047 Inches Minimum And 0.141 Inches Maximum |
| Material: | Aluminum Alloy Sleeve |

How to Order

Order this blind rivet from our inventory online by visiting <https://military-fasteners.com/rivets/blind+rivets/NAS1720H4L2A> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.