

**Description**

Thread: 10-32, Nut Length: 1/2", Nut Height: 1/4, two lug, dry film lubricant, anchor, NAS1789 series nut


\* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

**Additional Information****Alternate Part Numbers**

[10AD25A306M11](#)

|                         |   |
|-------------------------|---|
| SKU / Model:            | NAS17893                                  |
| Minimum Qty (MOQ):      | 10  |
| NSN:                    | 5310-01-058-3972                          |
| Schedule B:             | 7318.16.0085                              |
| ECCN:                   | EAR99                                     |
| National Motor Freight: | 093486, Bolts,nuts Or Screws, Noi (sub 3) |

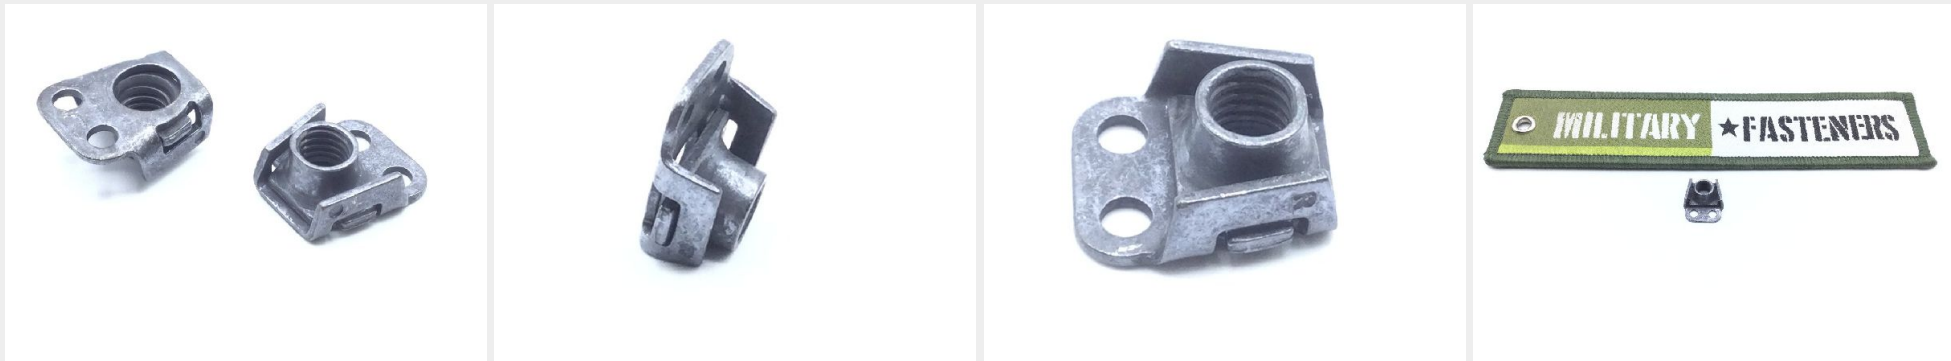

\* See page 2 for technical characteristics

## P/N NAS1789-3 Specifications

|  |  |
|--|--|
| <b>Thread Class:</b>   | 3b   |
| <b>Thread Direction:</b>   | Right-hand   |
| <b>Locking Feature:</b>  | Prevailing Torque All Metal Design                                 |
| <b>Counterbore Diameter:</b>   | 0.194 Inches Minimum Nut   |
| <b>Lubrication:</b>  | Dry Film Lubricant   |
| <b>Mounting Hole Diameter:</b>                                       | 0.098 Inches Minimum And 0.103 Inches Maximum                      |
| <b>Nut Style:</b>  | Plate  |
| <b>Nut Length:</b>   | 0.525 Inches Maximum   |
| <b>Nut Height:</b>   | 0.250 Inches Maximum   |
| <b>Plate Thickness:</b>  | 0.032 Inches Maximum   |
| <b>Plate Width:</b>  | 0.490 Inches Maximum   |
| <b>Nut Counterbore Depth:</b>  | 0.062 Inches Minimum Nut   |
| <b>Nut Mounting Provision:</b>                                       | Straight Holes   |
| <b>Mounting Hole Arrangement Style:</b>                              | 2 Holes  |
| <b>Distance From Aperture Center To Mounting Hole Center:</b>        | 0.250 Inches Nominal   |
| <b>Center To Center Distance Between Mounting Holes Along Width:</b> | 0.217 Inches Minimum And 0.221 Inches Maximum                      |
| <b>Temp Rating:</b>  | 450.0 Deg Fahrenheit Maximum                                       |
| <b>Thread Series:</b>  | Unjf   |
| <b>Features Provided:</b>  | Floating Nut   |
| <b>Thread Quantity Per Inch:</b>                                     | 32   |
| <b>Nominal Thread Size:</b>  | 0.190 Inches   |
| <b>Material:</b>   | Steel Comp 1030 Overall  |
| <b>Surface Treatment:</b>  | Cadmium Overall And Chromate Overall                               |
| <b>Surface Treatment Document And Classification:</b>                | Qq-p-416,type 2,class 2 Fed Spec Single Treatment Response Overall |
| <b>Specification/standard Data:</b>                                  | 80205-nas1789 Professional/industrial Association Standard         |

## How to Order

Order this self-locking nutplate from our inventory online by visiting [https://military-fasteners.com/nuts/self\\_locking+nutplates/NAS1789-3](https://military-fasteners.com/nuts/self_locking+nutplates/NAS1789-3) and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.