

**Description**


size: 1/8", grip range: 1/16" - 1/8", protruding head general purpose, aluminum, NAS1919 series rivet

\* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

**Additional Information**

SKU / Model:	NAS1919B0402
Minimum Qty (MOQ):	10
NSN:	5320-00-150-4092
ECCN:	EAR99
National Motor Freight:	106510, Rivets I / S Plain / Galvanized Etc

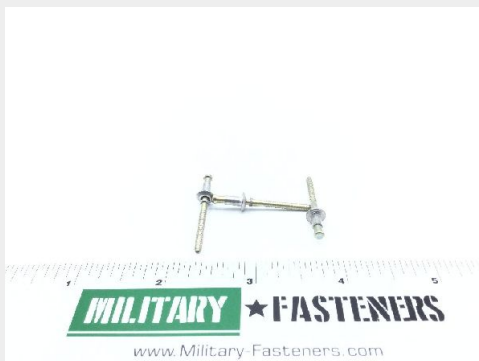

\* See page 2 for technical characteristics

# P/N NAS1919B04-02 Specifications

Fastener Length:	0.260 Inches Maximum
Head Style:	Universal
Head Height:	0.054 Inches Minimum And 0.064 Inches Maximum
Shank Diameter:	0.124 Inches Minimum And 0.130 Inches Maximum
Shank Style:	Self-plugging Mechanically Locked Stem
Head Major Diameter:	0.238 Inches Minimum And 0.262 Inches Maximum
Expansion Device:	Serrated Stem-type W
Grip Length:	0.063 Inches Minimum And 0.125 Inches Maximum
Material:	Aluminum Alloy 2024 Sleeve
Material:	Aluminum Alloy 2024 Stem
Material Document And Classification:	Qq-a-430 Fed Spec Single Material Response Sleeve
Material Document And Classification:	Qq-a-430 Fed Spec Single Material Response Stem
Surface Treatment:	Anodize Sleeve
Surface Treatment:	Anodize Stem
Surface Treatment Document And Classification:	Mil-a-8625 Mil Spec 1st Treatment Response Sleeve
Surface Treatment Document And Classification:	Mil-a-8625 Mil Spec 1st Treatment Response Stem

## How to Order

Order this blind rivet from our inventory online by visiting <https://military-fasteners.com/rivets/blind+rivets/NAS1919B04-02> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.