
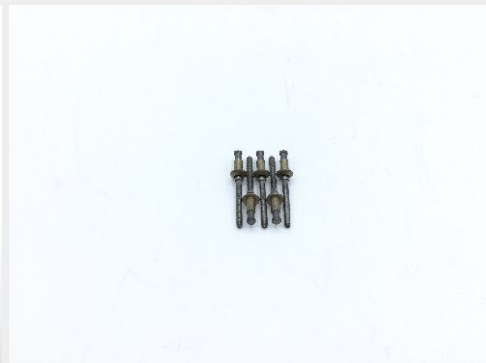


Description

Fastener Length: 1/4",

* Manufacturer certifications are shipped with your order FREE of charge[Order this part online](#)**Additional Information**

SKU / Model:	NAS1919C0402W
Minimum Qty (MOQ):	5
NSN:	5320-00-216-8613
ECCN:	EAR99
National Motor Freight:	106510, Rivets I / S Plain / Galvanized Etc

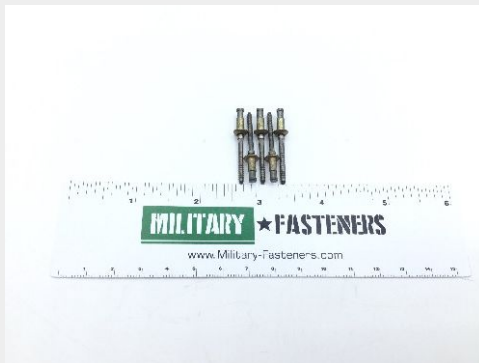

* See page 2 for technical characteristics

P/N NAS1919C04-02W Specifications

Fastener Length:	0.260 Inches Maximum
Head Style:	Universal
Head Height:	0.054 Inches Minimum And 0.064 Inches Maximum
Shank Diameter:	0.124 Inches Minimum And 0.128 Inches Maximum
Shank Style:	Self-plugging Mechanically Locked Stem
Head Major Diameter:	0.238 Inches Minimum And 0.262 Inches Maximum
Expansion Device:	Serrated Stem-type W
Grip Length:	0.063 Inches Minimum And 0.125 Inches Maximum
Material:	Iron Alloy 660 Body
Material:	Iron Alloy 660 Locking Ring
Material:	Iron Alloy 660 Stem
Material Document And Classification:	Ams 5737 Assn Std Single Material Response Body
Material Document And Classification:	Ams 5737 Assn Std Single Material Response Locking Ring
Material Document And Classification:	Ams 5737 Assn Std Single Material Response Stem
Surface Treatment:	Cadmium Body And Chromate Body
Surface Treatment:	Passivate Locking Ring
Surface Treatment:	Passivate Stem
Surface Treatment Document And Classification:	Qq-p-35 Fed Spec Single Treatment Response Locking Ring
Surface Treatment Document And Classification:	Qq-p-35 Fed Spec Single Treatment Response Stem
Surface Treatment Document And Classification:	Qq-p-416,type 2,class 3 Fed Spec All Treatment Responses Body
Specification/standard Data:	80205-nas1919 Professional/industrial Association Standard

How to Order

Order this blind rivet from our inventory online by visiting <https://military-fasteners.com/rivets/blind+rivets/NAS1919C04-02W> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.