


**Description**

Fastener Length: 7/16

\* Manufacturer certifications are shipped with your order FREE of charge[Order this part online](#)**Additional Information**

SKU / Model:	NAS1919C0405
Minimum Qty (MOQ):	5
NSN:	5320-01-123-6460
ECCN:	EAR99
National Motor Freight:	096320, Rivets I / S Nickel Plated Buffed

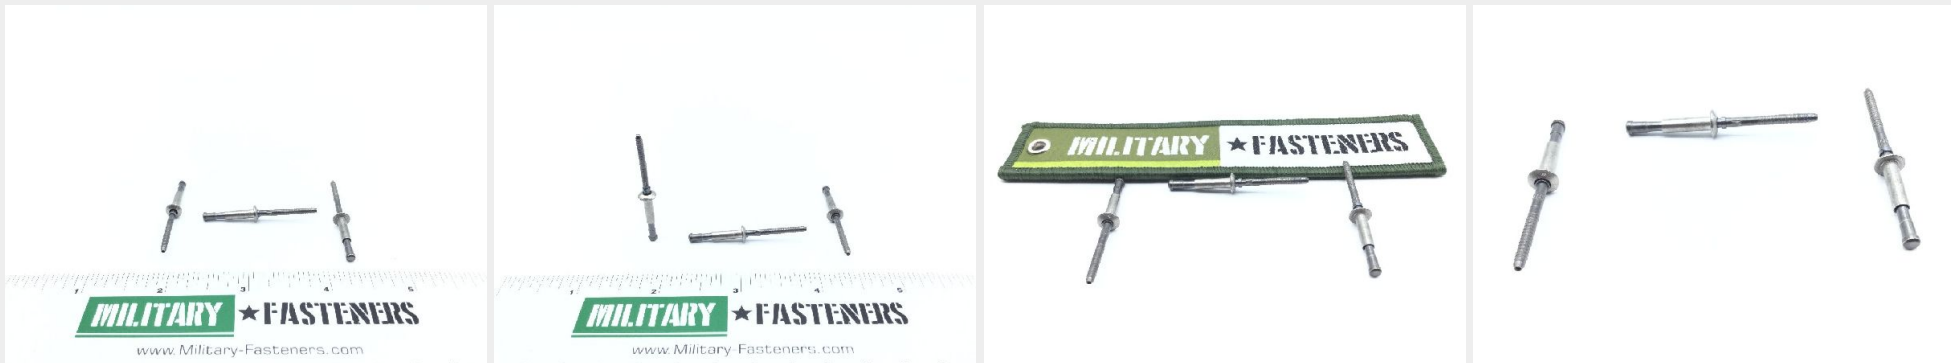

\* See page 2 for technical characteristics

## P/N NAS1919C04-05 Specifications

<b>Fastener Length:</b>	0.448 Inches Nominal
<b>Head Style:</b>	Universal
<b>Head Height:</b>	0.054 Inches Nominal
<b>Shank Diameter:</b>	0.125 Inches Nominal
<b>Shank Style:</b>	Self-plugging Mechanically Locked Stem
<b>Head Major Diameter:</b>	0.250 Inches Nominal
<b>Expansion Device:</b>	Break Stem
<b>Grip Length:</b>	0.251 Inches Minimum And 0.312 Inches Maximum
<b>Material:</b>	Iron Alloy 660 Overall
<b>Material Document And Classification:</b>	Ams5737 Assn Std Single Material Response Overall
<b>Surface Treatment:</b>	Passivate Locking Ring
<b>Surface Treatment:</b>	Passivate Sleeve Or Cadmium Sleeve
<b>Surface Treatment:</b>	Passivate Stem
<b>Surface Treatment Document And Classification:</b>	Qq-p-35 Fed Spec 1st Treatment Response Sleeve Or Qq-p-416 Ty li Cl3 Fed Spec 2nd Treatment Response Sleeve
<b>Surface Treatment Document And Classification:</b>	Qq-p-35 Fed Spec Single Treatment Response Locking Ring
<b>Surface Treatment Document And Classification:</b>	Qq-p-35 Fed Spec Single Treatment Response Stem

## How to Order

Order this blind rivet from our inventory online by visiting <https://military-fasteners.com/rivets/blind+rivets/NAS1919C04-05> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.