
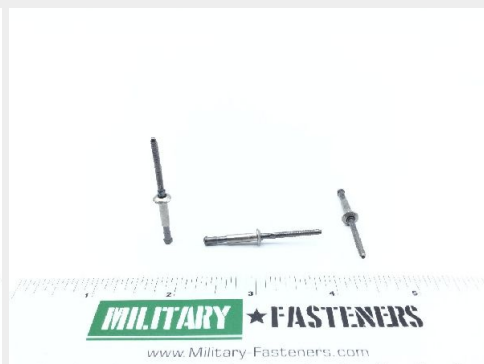


Description

Fastener Length: 7/16

* Manufacturer certifications are shipped with your order FREE of charge[Order this part online](#)**Additional Information**

SKU / Model:	NAS1919C0405
Minimum Qty (MOQ):	5
NSN:	5320-01-123-6460
ECCN:	EAR99
National Motor Freight:	096320, Rivets I / S Nickel Plated Buffed

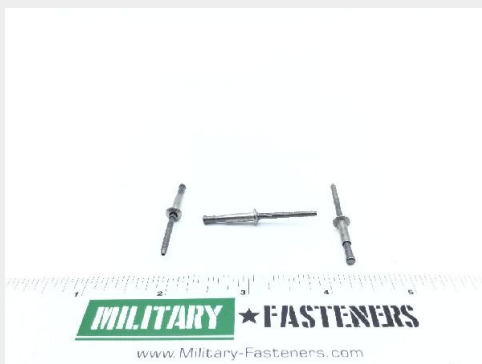

* See page 2 for technical characteristics

P/N NAS1919C04-05 Specifications

Fastener Length:	0.448 Inches Nominal
Head Style:	Universal
Head Height:	0.054 Inches Nominal
Shank Diameter:	0.125 Inches Nominal
Shank Style:	Self-plugging Mechanically Locked Stem
Head Major Diameter:	0.250 Inches Nominal
Expansion Device:	Break Stem
Grip Length:	0.251 Inches Minimum And 0.312 Inches Maximum
Material:	Iron Alloy 660 Overall
Material Document And Classification:	Ams5737 Assn Std Single Material Response Overall
Surface Treatment:	Passivate Locking Ring
Surface Treatment:	Passivate Sleeve Or Cadmium Sleeve
Surface Treatment:	Passivate Stem
Surface Treatment Document And Classification:	Qq-p-35 Fed Spec 1st Treatment Response Sleeve Or Qq-p-416 Ty li Cl3 Fed Spec 2nd Treatment Response Sleeve
Surface Treatment Document And Classification:	Qq-p-35 Fed Spec Single Treatment Response Locking Ring
Surface Treatment Document And Classification:	Qq-p-35 Fed Spec Single Treatment Response Stem

How to Order

Order this blind rivet from our inventory online by visiting <https://military-fasteners.com/rivets/blind+rivets/NAS1919C04-05> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.