


Description

NAS1921C04S02U Blind Rivet

* Manufacturer certifications are shipped with your order FREE of charge[Order this part online](#)**Additional Information**

SKU / Model:	NAS1921C04S02U
Minimum Qty (MOQ):	20
NSN:	5320-01-508-6783
Schedule B:	7318.23.0000
ECCN:	EAR99
National Motor Freight:	096320, Rivets I / S Nickel Plated Buffed

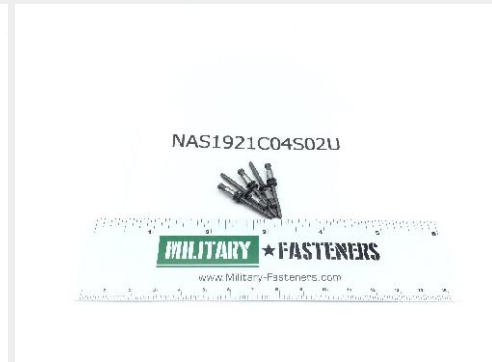

* See page 2 for technical characteristics

P/N NAS1921C04S02U Specifications

Fastener Length:	0.260 Inches Maximum
Head Style:	Flush (flat) Countersunk (included Angle - Less Than 135 Deg W Or W/o Chamfer)
Shank Diameter:	0.125 Inches Nominal
Shank Style:	Self-plugging Mechanically Locked Stem
Head Major Diameter:	0.221 Inches Minimum And 0.229 Inches Maximum
Expansion Device:	Serrated Stem-type W
Grip Length:	0.063 Inches Minimum And 0.125 Inches Maximum
Countersink Angle:	99.0 Degrees Minimum And 101.0 Degrees Maximum
Special Features:	For Use With Single Action (non-shifting) Hand Held Installation Tools Or In Automated Installation Equipment; With Drive Anvil Washer
Material:	Iron Alloy 660 Overall
Material Document And Classification:	Ams5737 Assn Std Single Material Response Overall
Surface Treatment:	Passivate Locking Ring
Surface Treatment:	Passivate Sleeve Or Cadmium Sleeve Or Aluminum Sleeve
Surface Treatment:	Passivate Stem
Surface Treatment Document And Classification:	Qq-p-35 Fed Spec 1st Treatment Response Sleeve Or Qq-p-416 Tyii Cl3 Fed Spec 2nd Treatment Response Sleeve Or Nas4006 Assn Std 3rd Treatment Response Sleeve
Surface Treatment Document And Classification:	Qq-p-35 Fed Spec Single Treatment Response Locking Ring
Surface Treatment Document And Classification:	Qq-p-35 Fed Spec Single Treatment Response Stem

How to Order

Order this blind rivet from our inventory online by visiting <https://military-fasteners.com/rivets/blind+rivets/NAS1921C04S02U> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.