


Description

Fastener Length: 1-5/16", Thread: 3/8-24, Thread Length: 1-25/32",

* Manufacturer certifications are shipped with your order FREE of charge[Order this part online](#)**Additional Information**

SKU / Model:	NAS4286A12
Minimum Qty (MOQ):	5
NSN:	5306-01-481-7449
Schedule B:	7318.15.8085
ECCN:	EAR99
National Motor Freight:	093490, Bolt / Nut / Screw / Clips / Fastener / Etc

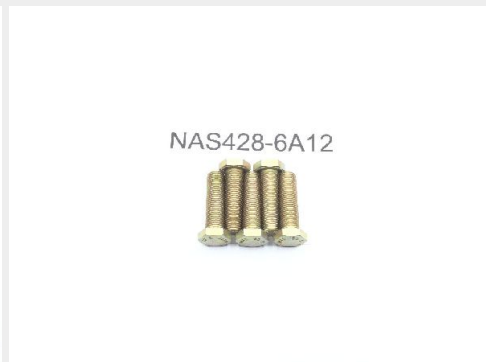

P/N NAS428-6A12 Specifications

Thread Class:	3a
Thread Direction:	Right-hand
Thread Length:	1.688 Inches Minimum And 1.781 Inches Maximum
Fastener Length:	1.250 Inches Minimum And 1.312 Inches Maximum
Head Style:	Crowned Hexagon
Head Height:	0.193 Inches Minimum And 0.213 Inches Maximum
Width Between Flats:	0.553 Inches Minimum And 0.565 Inches Maximum
Nominal Thread Diameter:	0.375 Inches
Grip Length:	0.031 Inches Minimum And 0.062 Inches Maximum
Thread Quantity Per Inch:	24
Material:	Steel Comp 4140 Overall Or Steel Comp 8740 Overall Or Steel Comp 8630 Overall Or Steel Comp 8735 Overall Or Steel Comp 4130 Overall Or Steel Comp 4037 Overall
Thread Series Designator:	Unf

How to Order

Order this machine bolt from our inventory online by visiting <https://military-fasteners.com/bolts/machine+bolts/NAS428-6A12> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.