

Description


Length: 1/4"

* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

Additional Information

SKU / Model:	NAS43DD319FC
Minimum Qty (MOQ):	25
NSN:	5365-00-580-4830
National Motor Freight:	013120, Aluminum Article Noi Sub 6

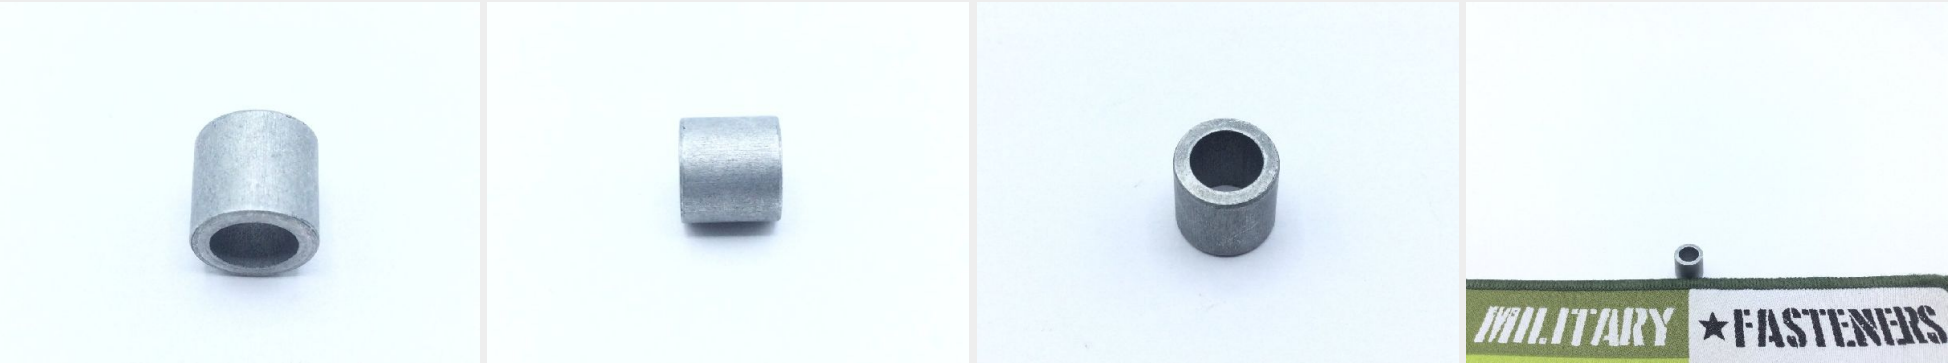

* See page 2 for technical characteristics

P/N NAS43DD3-19FC Specifications

Overall Length:	0.2920 Inches Minimum And 0.3020 Inches Maximum
Overall Length:	0.297 Inches Nominal
Body Outside Diameter:	0.3020 Inches Minimum And 0.3220 Inches Maximum
Body Inside Diameter:	0.1940 Inches Minimum And 0.2340 Inches Maximum
Corner Shape:	Square All Corners
Material:	Aluminum Alloy Overall
Material:	Aluminum Alloy 2024 Overall
Material Document And Classification:	Ams-ww-t-700/3 Type I Fed Std Single Material Response And Amx-qq-a-225/6 Fed Std Single Material Response Overall
Surface Treatment:	Anodize Overall
Surface Treatment Document And Classification:	Mil-dtl-5541, Class 1a Mil Spec All Treatment Responses Overall
Style Designator:	17c Solid, Plain, No Outside Flanges
Style Designator:	Solid, Plain, No Outside Flanges

How to Order

Order this sleeve spacer from our inventory online by visiting <https://military-fasteners.com/spacers/sleeve+spacers/NAS43DD3-19FC> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.