



Military-Fasteners.com

P/N NAS464P5LA20

Description


Fastener Length: 1-5/8", Thread: 1/4-24, Thread Length: 3/8", NAS464 series bolt

* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

Additional Information

SKU / Model:	NAS464P5LA20
Minimum Qty (MOQ):	5
NSN:	5306-00-680-4971
Schedule B:	7318.15.8085
ECCN:	EAR99
National Motor Freight:	093486, Bolts,nuts Or Screws, Noi (sub 3)

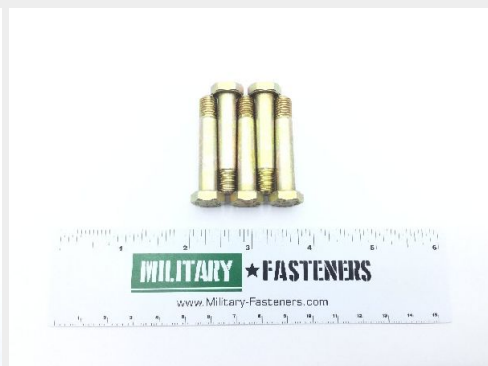

* See page 2 for technical characteristics

P/N NAS464P5LA20 Specifications

Thread Class:	3a
Thread Direction:	Right-hand
Thread Length:	0.406 Inches Minimum
Fastener Length:	1.656 Inches Nominal
Head Style:	Hexagon
Head Height:	0.140 Inches Minimum And 0.172 Inches Maximum
Width Between Flats:	0.490 Inches Minimum And 0.502 Inches Maximum
Grip Diameter:	0.3108 Inches Minimum And 0.3117 Inches Maximum
Nominal Thread Diameter:	0.312 Inches
Grip Length:	1.250 Inches Nominal
Thread Quantity Per Inch:	24
Minimum Tensile Strength:	160000 Pounds Per Square Inch
Hardness Rating:	36.0 Rockwell C Minimum Overall And 40.0 Rockwell C Maximum Overall
Material:	Steel Comp E4340 Overall Or Steel Comp 4140 Overall Or Steel Comp 8740 Overall Or Steel Comp 8735 Overall Or Steel Comp 6150 Overall
Surface Treatment:	Cadmium Overall And Chromate Overall
Surface Treatment Document And Classification:	Qq-p-416 Ty 2 Cl 2 Fed Spec Single Treatment Response Overall
Thread Series Designator:	Unjf
Specification/standard Data:	80205-nas464 Professional/industrial Association Standard

How to Order

Order this machine bolt from our inventory online by visiting <https://military-fasteners.com/bolts/machine+bolts/NAS464P5LA20> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.