



★ FASTENERS

Military-Fasteners.com

P/N NAS514P440-12P

Description


length: 3/4", thread: 4-40, machine screw, full thread, philips recess, alloy steel cad ii plated

* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

Additional Information

SKU / Model:	NAS514P44012P
Minimum Qty (MOQ):	100
NSN:	5305-00-058-5145
ECCN:	EAR99
National Motor Freight:	093486, Bolts,nuts Or Screws, Noi (sub 3)

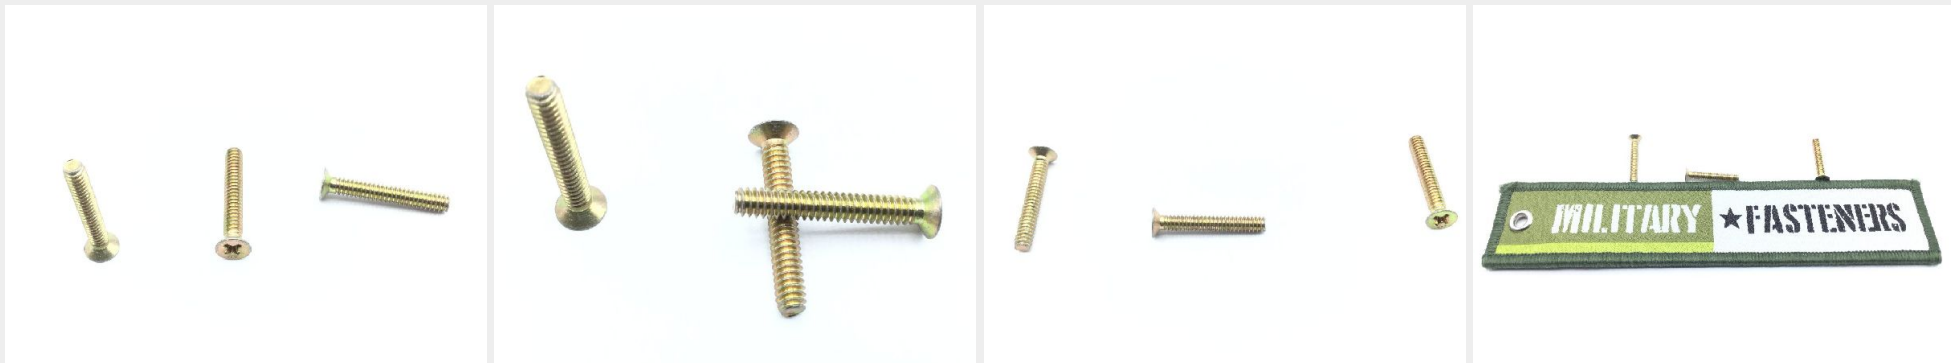

* See page 2 for technical characteristics

P/N NAS514P440-12P Specifications

Thread Class:	3a
Thread Direction:	Right-hand
Thread Length:	0.674 Inches Minimum
Fastener Length:	0.719 Inches Minimum And 0.750 Inches Maximum
Head Style:	Flat Countersunk
Head Diameter:	0.183 Inches Minimum And 0.225 Inches Maximum
Internal Drive Style:	Cross Recess Type 1
End Item Identification:	W/s:aircraft, B-2 Bomber (atb); Aircraft, Viking S-3b; Missile, Minuteman Lgm-30; Missile, Strategic Air To Ground (sram ii); Missile, All-weather Anti-ship, Harpoon (agm-84); Support Equipment, B-1 Aircraft; Aircraft, Awacs, E-3a; Joint Stars Target Radar System; Aircraft, Intruder A-6e
Nominal Thread Diameter:	0.112 Inches
Thread Quantity Per Inch:	40
Minimum Tensile Strength:	125000 Pounds Per Square Inch
Hardness Rating:	26.0 Rockwell C Minimum And 32.0 Rockwell C Maximum
Countersink Angle:	99.0 Degrees Minimum And 101.0 Degrees Maximum
Screw Material:	Steel
Screw Surface Treatment:	Cadmium And Chromate
Screw Surface Treatment Document And Classification:	Qq-p-416 Ty 2 Cl 3 Fed Spec Single Treatment Response
Thread Series Designator:	Unjc
Specification/standard Data:	80205-nas514 Professional/industrial Association Standard

How to Order

Order this machine screw from our inventory online by visiting <https://military-fasteners.com/screws/machine+screws/NAS514P440-12P> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.