

Description


length: 3/16", thread: 6-32, machine screw, full thread, philips recess, alloy steel cad ii plated

* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

Additional Information

| | |
|-------------------------|---|
| SKU / Model: | NAS514P6323P |
| Minimum Qty (MOQ): | 100 |
| NSN: | 5305-00-891-5557 |
| ECCN: | EAR99 |
| National Motor Freight: | 093486, Bolts,nuts Or Screws, Noi (sub 3) |

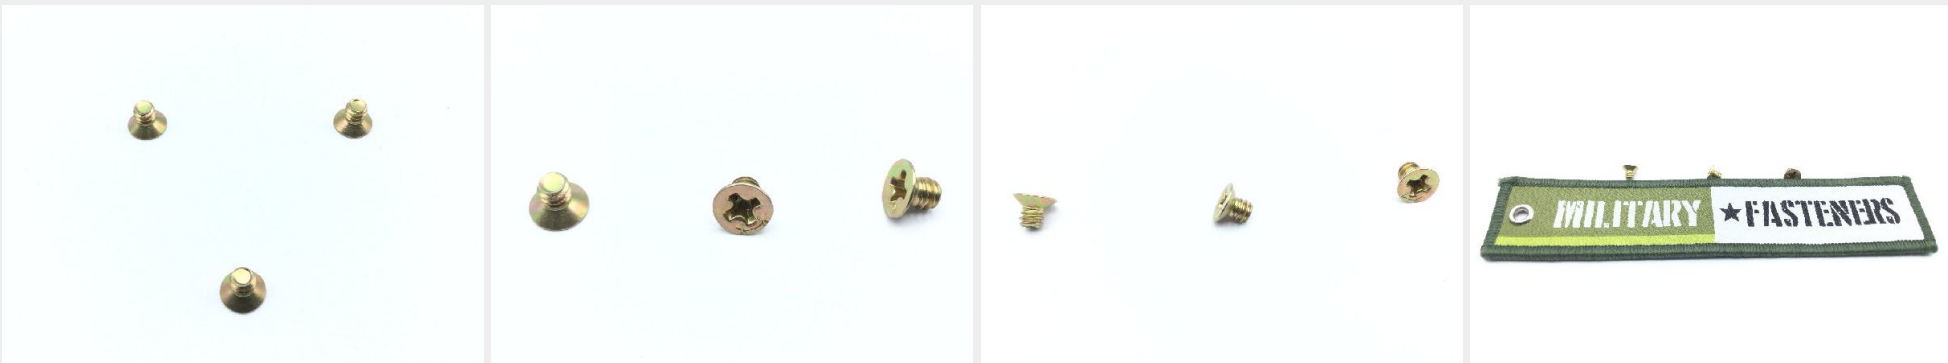

* See page 2 for technical characteristics

P/N NAS514P632-3P Specifications

| | |
|---|--|
| Thread Class: | 3a |
| Thread Direction: | Right-hand |
| Thread Length: | 0.037 Inches Minimum And 0.130 Inches Maximum |
| Fastener Length: | 0.156 Inches Minimum And 0.188 Inches Maximum |
| Head Style: | Flat Countersunk |
| Head Diameter: | 0.233 Inches Minimum And 0.279 Inches Maximum |
| Internal Drive Style: | Cross Recess Type 1 |
| Nominal Thread Diameter: | 0.138 Inches |
| Thread Quantity Per Inch: | 32 |
| Minimum Tensile Strength: | 125000 Pounds Per Square Inch |
| Hardness Rating: | 26.0 Rockwell C Minimum And 32.0 Rockwell C Maximum |
| Countersink Angle: | 99.0 Degrees Minimum And 101.0 Degrees Maximum |
| Screw Material: | Steel Comp 8630 Or Steel Comp 4037 |
| Screw Material Document And Classification: | Mil-s-6050 Mil Spec 1st Material Response Or Ams 6300 Assn Std 2nd Material Response |
| Screw Surface Treatment: | Cadmium And Chromate |
| Screw Surface Treatment Document And Classification: | Qq-p-416,type 2,class 3 Fed Spec Single Treatment Response |
| Thread Series Designator: | Unjc |
| Specification/standard Data: | 80205-nas514 Professional/industrial Association Standard |

How to Order

Order this machine screw from our inventory online by visiting <https://military-fasteners.com/screws/machine+screws/NAS514P632-3P> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.