



★ FASTENERS

Military-Fasteners.com

P/N NAS514P632-6B

## Description


Fastener Length: 3/8", Thread: 6-32, Thread Length: 3/8", black cadmium, philips, NAS514 series screw

\* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

## Additional Information

|                         |   |
|-------------------------|---|
| SKU / Model:            | NAS514P6326B                              |
| Minimum Qty (MOQ):      | 100                                       |
| NSN:                    | 5305-00-852-1707                          |
| Schedule B:             | 7318.15.6080                              |
| ECCN:                   | EAR99                                     |
| National Motor Freight: | 093486, Bolts,nuts Or Screws, Noi (sub 3) |

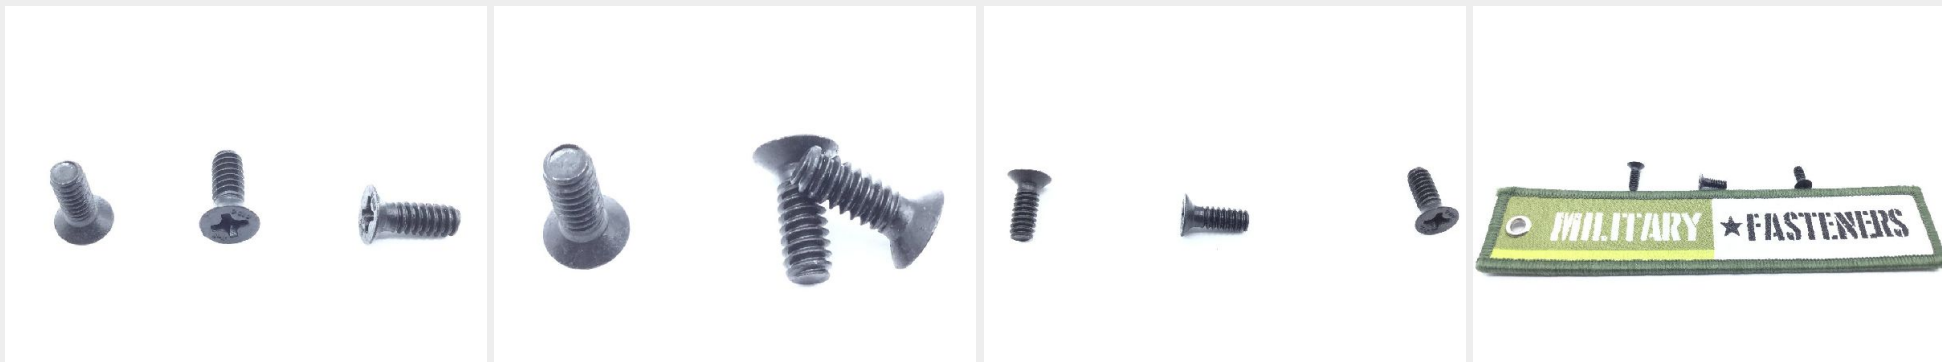

\* See page 2 for technical characteristics

## P/N NAS514P632-6B Specifications

|   |   |
|---|---|
| <b>Thread Class:</b>  | 3a  |
| <b>Thread Direction:</b>                                    | Right-hand  |
| <b>Thread Length:</b>                                       | 0.313 Inches Minimum And 0.375 Inches Maximum   |
| <b>Fastener Length:</b>                                     | 0.375 Inches Nominal  |
| <b>Head Style:</b>  | Flat Countersunk  |
| <b>Head Diameter:</b>                                       | 0.233 Inches Minimum And 0.279 Inches Maximum   |
| <b>Internal Drive Style:</b>                                | Cross Recess Type 1   |
| <b>Nominal Thread Diameter:</b>                             | 0.138 Inches  |
| <b>Thread Quantity Per Inch:</b>                            | 32  |
| <b>Minimum Tensile Strength:</b>                            | 125000 Pounds Per Square Inch   |
| <b>Hardness Rating:</b>                                     | 26.0 Rockwell C Minimum And 32.0 Rockwell C Maximum                                     |
| <b>Countersink Angle:</b>                                   | 99.0 Degrees Minimum And 101.0 Degrees Maximum  |
| <b>Screw Material:</b>                                      | Steel Comp 8630   |
| <b>Screw Material Document And Classification:</b>          | Mil-s-6050 Mil Spec Single Material Response Or An-s-9 Mil Std Single Material Response |
| <b>Screw Surface Treatment:</b>                             | Cadmium And Chromate  |
| <b>Screw Surface Treatment Document And Classification:</b> | Qq-p-416 Ty 2 Cl 3 Fed Spec All Treatment Responses                                     |
| <b>Special Features:</b>                                    | Chromate Dip Under Pac Sftt To Be Black In Lieu Of Yellow                               |
| <b>Thread Series Designator:</b>                            | Unc   |

## How to Order

Order this machine screw from our inventory online by visiting <https://military-fasteners.com/screws/machine+screws/NAS514P632-6B> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.