



★ FASTENERS

Military-Fasteners.com

P/N NAS514P632-9P

Description



length: 9/16", thread: 6-32, countersunk machine screw, phillips recess, full thread, cadmium plated alloy steel

* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

Additional Information

SKU / Model:	NAS514P6329P
Minimum Qty (MOQ):	100
NSN:	5305-00-556-8363
ECCN:	EAR99
National Motor Freight:	093486, Bolts,nuts Or Screws, Noi (sub 3)

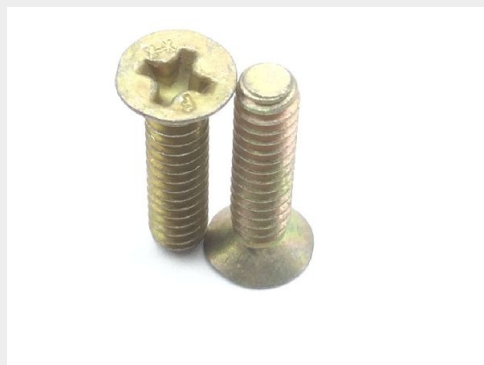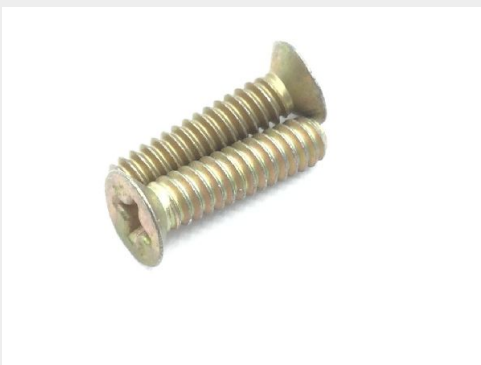

* See page 2 for technical characteristics

P/N NAS514P632-9P Specifications

Thread Class:	3a
Thread Direction:	Right-hand
Thread Length:	0.412 Inches Minimum And 0.505 Inches Maximum
Fastener Length:	0.531 Inches Minimum And 0.562 Inches Maximum
Head Style:	Flat Countersunk
Head Diameter:	0.233 Inches Minimum And 0.279 Inches Maximum
Internal Drive Style:	Cross Recess Type 1
Nominal Thread Diameter:	0.138 Inches
Thread Quantity Per Inch:	32
Minimum Tensile Strength:	125000 Pounds Per Square Inch
Hardness Rating:	26.0 Rockwell C Minimum And 32.0 Rockwell C Maximum
Countersink Angle:	99.0 Degrees Minimum And 101.0 Degrees Maximum
Screw Material:	Steel Comp 4037 Or Steel Comp 8630
Screw Material Document And Classification:	Ams 6300 Assn Std 1st Material Response Or Mil-s-6050 Mil Spec 2nd Material Response
Screw Surface Treatment:	Cadmium And Chromate
Screw Surface Treatment Document And Classification:	Qq-p-416,ty 2,cl 2 Fed Spec Single Treatment Response
Thread Series Designator:	Unjc
Specification/standard Data:	80205-nas514 Professional/industrial Association Standard

How to Order

Order this machine screw from our inventory online by visiting <https://military-fasteners.com/screws/machine+screws/NAS514P632-9P> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.