



★ FASTENERS

Military-Fasteners.com

P/N NAS514P832-32P

Description


length: 2", thread: 8-32, 100% , machine screw - full thread - philips recess - alloy steel cad ii plated "

* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

Additional Information

SKU / Model:	NAS514P83232P
Minimum Qty (MOQ):	50
NSN:	5305-01-346-4447
National Motor Freight:	096640, Screws, Iron Or Steel

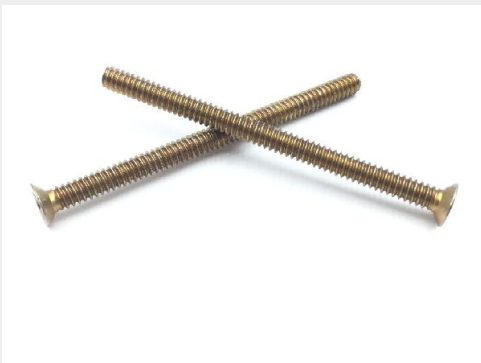

* See page 2 for technical characteristics

P/N NAS514P832-32P Specifications

Thread Class:	3a
Thread Direction:	Right-hand
Thread Length:	1.938 Inches Minimum And 2.000 Inches Maximum
Fastener Length:	2.000 Inches Nominal
Head Style:	Flat Countersunk
Head Diameter:	0.319 Inches Minimum And 0.332 Inches Maximum
Internal Drive Style:	Cross Recess Type 1
Nominal Thread Diameter:	0.164 Inches
Thread Quantity Per Inch:	32
Minimum Tensile Strength:	125000 Pounds Per Square Inch
Hardness Rating:	26.0 Rockwell C Minimum And 32.0 Rockwell C Maximum
Countersink Angle:	99.0 Degrees Minimum And 101.0 Degrees Maximum
Screw Material:	Steel Comp 4037 Or Steel Comp 8630
Screw Surface Treatment:	Cadmium And Chromate
Screw Surface Treatment Document And Classification:	Qq-p-416,type 2,class 2 Fed Spec Single Treatment Response
Special Features:	Unichrome Dip Bulletin 65-b-cd
Color:	Black
Thread Series Designator:	Unjf
Specification/standard Data:	80205-nas514 Professional/industrial Association Standard

How to Order

Order this machine screw from our inventory online by visiting <https://military-fasteners.com/screws/machine+screws/NAS514P832-32P> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.