


**Description**

Fastener Length: 1-9/64", Thread: 5/16-24, Thread Length: 17/32

\* Manufacturer certifications are shipped with your order FREE of charge[Order this part online](#)**Additional Information**

SKU / Model:	NAS58510
Minimum Qty (MOQ):	10
NSN:	5305-00-551-6734
ECCN:	EAR99
National Motor Freight:	093486, Bolts,nuts Or Screws, Noi (sub 3)

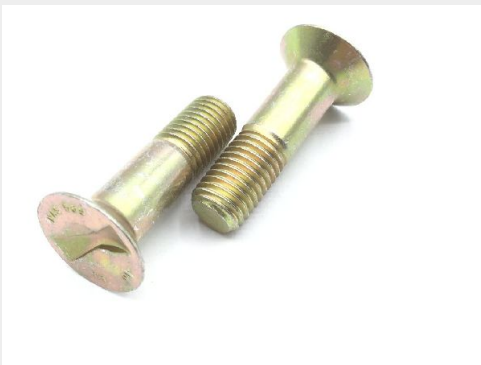

# P/N NAS585-10 Specifications

<b>Thread Class:</b>	3a
<b>Thread Direction:</b>	Right-hand
<b>Thread Length:</b>	0.531 Inches Minimum
<b>Fastener Length:</b>	1.140 Inches Minimum And 1.187 Inches Maximum
<b>Head Style:</b>	Flat Countersunk
<b>Head Diameter:</b>	0.629 Inches Minimum And 0.633 Inches Maximum
<b>Grip Diameter:</b>	0.3110 Inches Minimum And 0.3120 Inches Maximum
<b>Internal Drive Style:</b>	High-torque
<b>Nominal Thread Diameter:</b>	0.312 Inches
<b>Grip Length:</b>	0.625 Inches Nominal
<b>Thread Quantity Per Inch:</b>	24
<b>Minimum Tensile Strength:</b>	160000 Pounds Per Square Inch
<b>Hardness Rating:</b>	36.0 Rockwell C Minimum Overall And 40.0 Rockwell C Maximum Overall
<b>Countersink Angle:</b>	99.0 Degrees Minimum And 101.0 Degrees Maximum
<b>Surface Finish:</b>	32.0 Microinches Grip
<b>Surface Finish:</b>	32.0 Microinches Threads
<b>Material:</b>	Steel Comp 4140 Overall Or Steel Comp E4340 Overall Or Steel Comp 6150 Overall Or Steel Comp 8735 Overall Or Steel Comp 8740 Overall Or Steel Comp 4130 Overall
<b>Material Document And Classification:</b>	Mil-s-5626 Mil Spec 1st Material Response Overall Or Mil-s-5400 Mil Spec 2nd Material Response Overall Or Mil-s-8503 Mil Spec 3rd Material Response Overall Or Mil-s-6098 Mil Spec 4th Material Response Overall Or Mil-s-6049 Mil Spec 5th Material Response Overall Or Mil-s-6758 Mil Spec 6th Material Response Overall
<b>Surface Treatment:</b>	Cadmium Overall And Chromate Overall
<b>Surface Treatment Document And Classification:</b>	Qq-p-416 Ty 2 Cl 3 Fed Spec Single Treatment Response Overall
<b>Thread Series Designator:</b>	Unf
<b>Specification/standard Data:</b>	80205-nas585 Professional/industrial Association Standard

## How to Order

Order this close tolerance screw from our inventory online by visiting <https://military-fasteners.com/screws/close+tolerance+screws/NAS585-10> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.