



★ FASTENERS

Military-Fasteners.com

P/N NAS600-18P

Description


Fastener Length: 1-7/64", Thread: 4-40, Thread Length: 1-7/64

* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

Additional Information

SKU / Model:	NAS60018P
Minimum Qty (MOQ):	50
NSN:	5305-00-059-4556
Schedule B:	7318.15.6080
ECCN:	EAR99
National Motor Freight:	093486, Bolts,nuts Or Screws, Noi (sub 3)

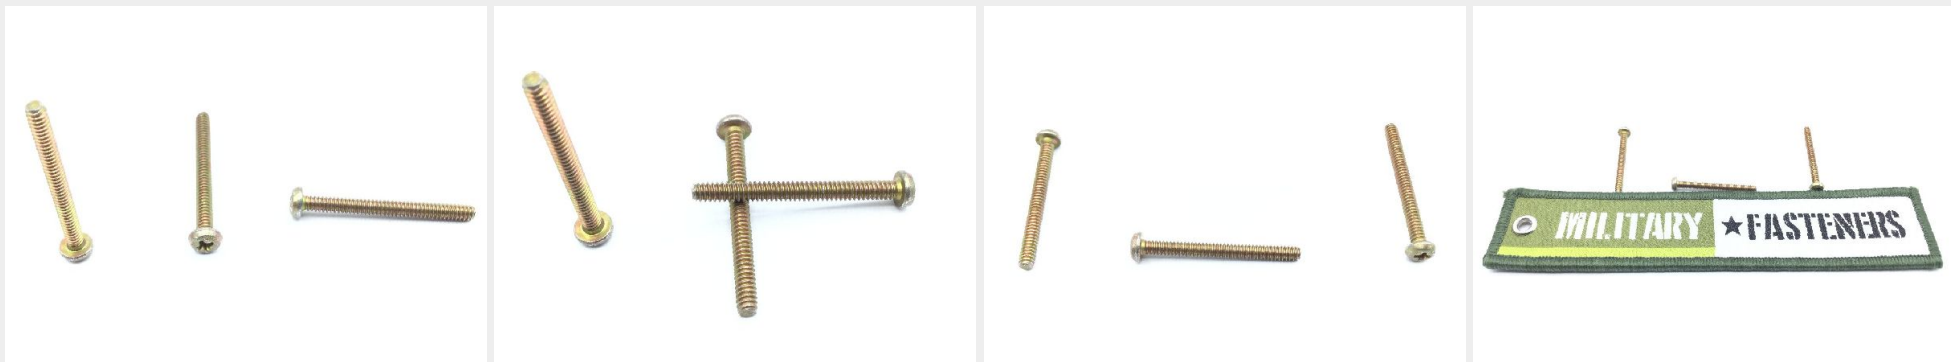

* See page 2 for technical characteristics

P/N NAS600-18P Specifications

Thread Class:	3a
Thread Direction:	Right-hand
Thread Length:	1.008 Inches Minimum And 1.120 Inches Maximum
Fastener Length:	1.053 Inches Minimum And 1.120 Inches Maximum
Head Style:	Pan
Head Diameter:	0.205 Inches Minimum And 0.219 Inches Maximum
Head Height:	0.070 Inches Minimum And 0.080 Inches Maximum
Internal Drive Style:	Cross Recess Type 1
Nominal Thread Diameter:	0.112 Inches
Thread Quantity Per Inch:	40
Minimum Tensile Strength:	160000 Pounds Per Square Inch
Screw Material:	Steel Comp 4037 Or Steel Comp 8630
Screw Material Document And Classification:	Ams 6300 Assn Std 1st Material Response Or Mil-s-6050 Mil Spec 2nd Material Response
Screw Surface Treatment:	Cadmium And Chromate
Screw Surface Treatment Document And Classification:	Qq-p-416,ty 2 Cl 2 Fed Spec Single Treatment Response
Thread Series Designator:	Unjc
Specification/standard Data:	80205-nas6000 Professional/Industrial Association Standard

How to Order

Order this machine screw from our inventory online by visiting <https://military-fasteners.com/screws/machine+screws/NAS600-18P> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.