



★ FASTENERS

Military-Fasteners.com

P/N NAS600-7B

## Description


Fastener Length: 7/16", Thread: 4-40, Thread Length: 7/16", NAS600 series screw

\* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

## Additional Information

|                         |   |
|-------------------------|---|
| SKU / Model:            | NAS6007B                                  |
| Minimum Qty (MOQ):      | 50  |
| NSN:                    | 5305-00-834-6170                          |
| Schedule B:             | 7318.15.6080                              |
| ECCN:                   | EAR99                                     |
| National Motor Freight: | 093486, Bolts,nuts Or Screws, Noi (sub 3) |

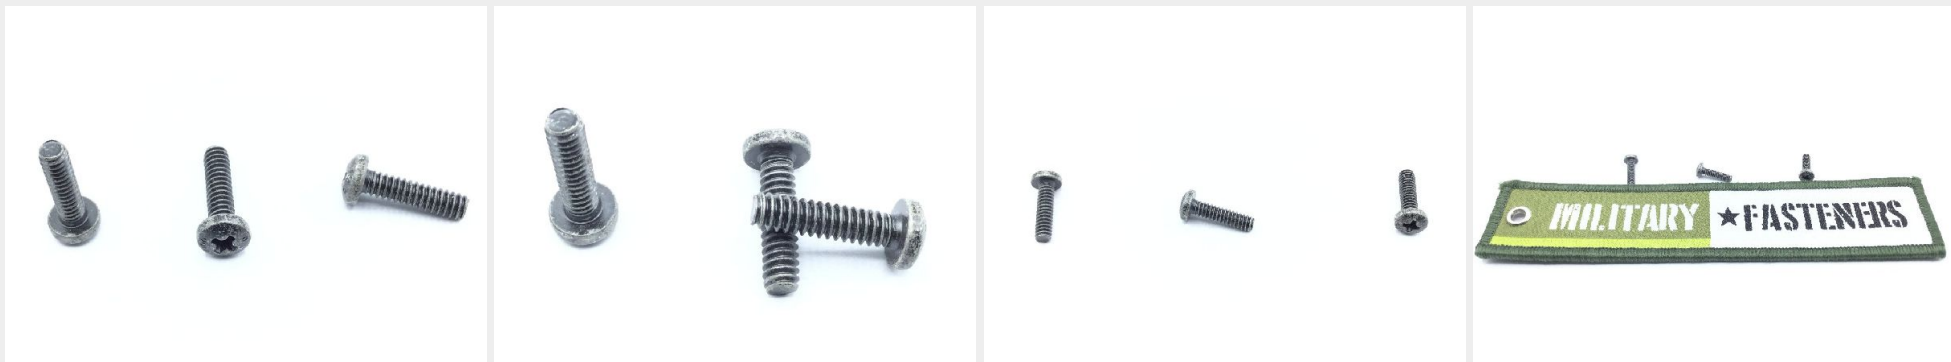

\* See page 2 for technical characteristics

## P/N NAS600-7B Specifications

|   |  |
|---|--|
| <b>Thread Class:</b>  | 3a   |
| <b>Thread Direction:</b>                                    | Right-hand   |
| <b>Thread Length:</b>                                       | 0.360 Inches Minimum And 0.440 Inches Maximum  |
| <b>Fastener Length:</b>                                     | 0.410 Inches Minimum And 0.440 Inches Maximum  |
| <b>Head Style:</b>  | Pan  |
| <b>Head Diameter:</b>                                       | 0.205 Inches Minimum And 0.219 Inches Maximum  |
| <b>Head Height:</b>   | 0.070 Inches Minimum And 0.080 Inches Maximum  |
| <b>Internal Drive Style:</b>                                | Cross Recess Type 1  |
| <b>Nominal Thread Diameter:</b>                             | 0.112 Inches   |
| <b>Thread Quantity Per Inch:</b>                            | 40   |
| <b>Minimum Tensile Strength:</b>                            | 160000 Pounds Per Square Inch  |
| <b>Hardness Rating:</b>                                     | 36.0 Rockwell C Minimum And 40.0 Rockwell C Maximum  |
| <b>Screw Material:</b>                                      | Steel Comp 8630  |
| <b>Screw Material Document And Classification:</b>          | Mil-s-6050 Mil Spec Single Material Response Or An-s-9 Mil Std Single Material Response  |
| <b>Screw Surface Treatment:</b>                             | Cadmium And Chromate And Chromium  |
| <b>Screw Surface Treatment Document And Classification:</b> | Qq-p-416,ty 2 Cl 3 Fed Spec 1st Treatment Response Or Qq-p-416,ty 2 Cl 3 Fed Spec 2nd Treatment Response Or Bulletin 65-8-cd Assn Std 3rd Treatment Response |
| <b>Thread Series Designator:</b>                            | Unjc   |

## How to Order

Order this machine screw from our inventory online by visiting <https://military-fasteners.com/screws/machine+screws/NAS600-7B> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.