



★ FASTENERS

Military-Fasteners.com

P/N NAS600-7B

## Description


Fastener Length: 7/16", Thread: 4-40, Thread Length: 7/16", NAS600 series screw

\* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

## Additional Information

SKU / Model:	NAS6007B
Minimum Qty (MOQ):	50
NSN:	5305-00-834-6170
Schedule B:	7318.15.6080
ECCN:	EAR99
National Motor Freight:	093486, Bolts,nuts Or Screws, Noi (sub 3)

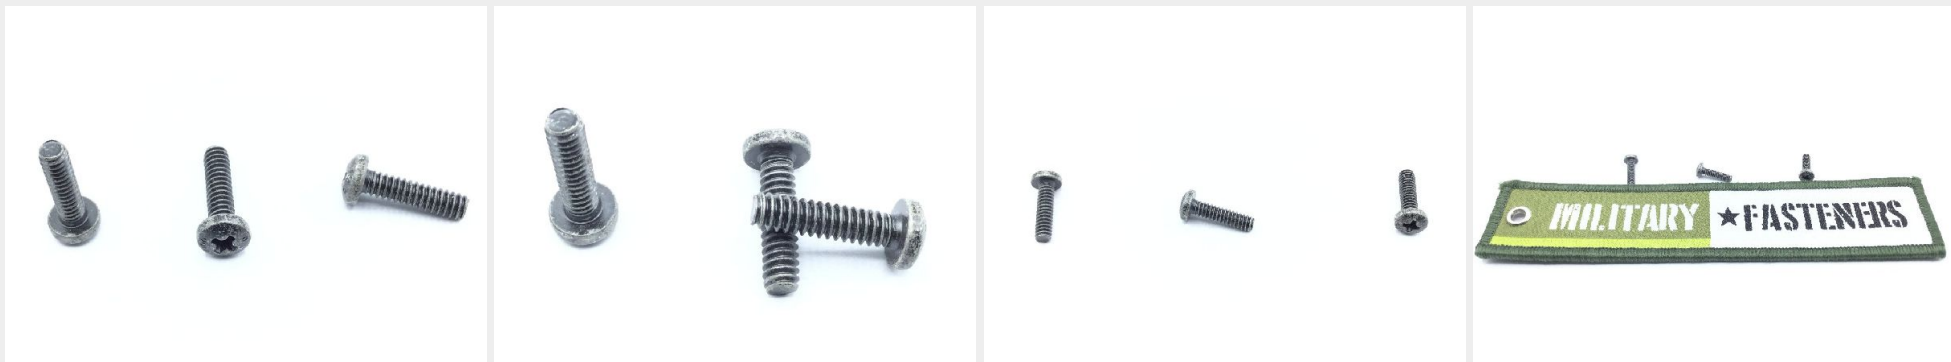

\* See page 2 for technical characteristics

## P/N NAS600-7B Specifications

<b>Thread Class:</b>	3a
<b>Thread Direction:</b>	Right-hand
<b>Thread Length:</b>	0.360 Inches Minimum And 0.440 Inches Maximum
<b>Fastener Length:</b>	0.410 Inches Minimum And 0.440 Inches Maximum
<b>Head Style:</b>	Pan
<b>Head Diameter:</b>	0.205 Inches Minimum And 0.219 Inches Maximum
<b>Head Height:</b>	0.070 Inches Minimum And 0.080 Inches Maximum
<b>Internal Drive Style:</b>	Cross Recess Type 1
<b>Nominal Thread Diameter:</b>	0.112 Inches
<b>Thread Quantity Per Inch:</b>	40
<b>Minimum Tensile Strength:</b>	160000 Pounds Per Square Inch
<b>Hardness Rating:</b>	36.0 Rockwell C Minimum And 40.0 Rockwell C Maximum
<b>Screw Material:</b>	Steel Comp 8630
<b>Screw Material Document And Classification:</b>	Mil-s-6050 Mil Spec Single Material Response Or An-s-9 Mil Std Single Material Response
<b>Screw Surface Treatment:</b>	Cadmium And Chromate And Chromium
<b>Screw Surface Treatment Document And Classification:</b>	Qq-p-416,ty 2 Cl 3 Fed Spec 1st Treatment Response Or Qq-p-416,ty 2 Cl 3 Fed Spec 2nd Treatment Response Or Bulletin 65-8-cd Assn Std 3rd Treatment Response
<b>Thread Series Designator:</b>	Unjc

## How to Order

Order this machine screw from our inventory online by visiting <https://military-fasteners.com/screws/machine+screws/NAS600-7B> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.