



★ FASTENERS

[Military-Fasteners.com](http://Military-Fasteners.com)

**P/N NAS603-7**

## Description


length: 7/16, thread: 10-32, pan head, fully threaded, phillips recess, alloy steel

\* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

## Additional Information

SKU / Model:	NAS6037
Minimum Qty (MOQ):	100
NSN:	5305-00-718-9473
ECCN:	EAR99
National Motor Freight:	093486, Bolts,nuts Or Screws, Noi (sub 3)

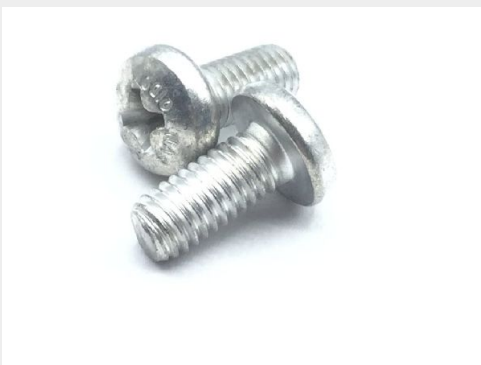

\* See page 2 for technical characteristics

# P/N NAS603-7 Specifications

Thread Class:	3a
Thread Direction:	Right-hand
Thread Length:	0.348 Inches Minimum And 0.440 Inches Maximum
Fastener Length:	0.410 Inches Minimum And 0.440 Inches Maximum
Head Style:	Pan
Head Diameter:	0.357 Inches Minimum And 0.373 Inches Maximum
Head Height:	0.122 Inches Minimum And 0.133 Inches Maximum
Internal Drive Style:	Cross Recess Type 1
Nominal Thread Diameter:	0.190 Inches
Thread Quantity Per Inch:	32
Minimum Tensile Strength:	160000 Pounds Per Square Inch
Hardness Rating:	36.0 Rockwell C Minimum And 40.0 Rockwell C Maximum
Screw Material:	Steel
Screw Surface Treatment:	Cadmium
Special Features:	Fleet Ballistic Missile Quality As Identified By Quality Control No Poso 913090
Thread Series Designator:	Unjf

## How to Order

Order this machine screw from our inventory online by visiting <https://military-fasteners.com/screws/machine+screws/NAS603-7> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.