



★ FASTENERS

Military-Fasteners.com

P/N NAS6205-21D

Description


Length: 1.750", grip: 1.312", thread: 5/16-24, hex head, drilled shank, tension, short thread, cadmium plated alloy steel, NAS6205 series bolt

* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

Additional Information

SKU / Model:	NAS620521D
Minimum Qty (MOQ):	10
NSN:	5306-01-142-2132
ECCN:	EAR99
National Motor Freight:	093486, Bolts,nuts Or Screws, Noi (sub 3)

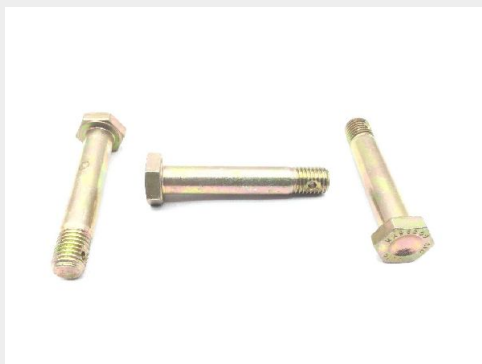

* See page 2 for technical characteristics

P/N NAS6205-21D Specifications

Thread Class:	3a
Thread Direction:	Right-hand
Thread Length:	0.438 Inches Nominal
Fastener Length:	1.750 Inches Nominal
Head Style:	Dished Hexagon
Head Height:	0.163 Inches Nominal
Width Between Flats:	0.500 Inches Nominal
Grip Diameter:	0.3125 Inches Nominal
Shank Unthreaded Hole Diameter:	0.112 Inches Nominal First Hole
Nominal Thread Diameter:	0.313 Inches
Grip Length:	1.312 Inches Nominal
Thread Quantity Per Inch:	24
Minimum Tensile Strength:	160000 Pounds Per Square Inch
Distance From Head Largest Bearing Surface To Shank Hole Center:	1.568 Inches Nominal First Hole
Material:	Steel Overall
Thread Series Designator:	Unjf
Specification/standard Data:	80205-nas6205 Professional/industrial Association Standard

How to Order

Order this shear bolt from our inventory online by visiting <https://military-fasteners.com/bolts/shear+bolts/NAS6205-21D> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.