

Description


Diameter: 0.138", thickness: .032, corrosion resistant, stainless steel, passivated, nas standards, NAS620 series washer

* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

Additional Information**Alternate Part Numbers**[NAS620-C6](#)

SKU / Model:	NAS620C6
Minimum Qty (MOQ):	100
NSN:	5310-00-773-7624
Schedule B:	7318.22.0000
ECCN:	EAR99
National Motor Freight:	194160, Washer Or Gaskets, Iron Or Steel,

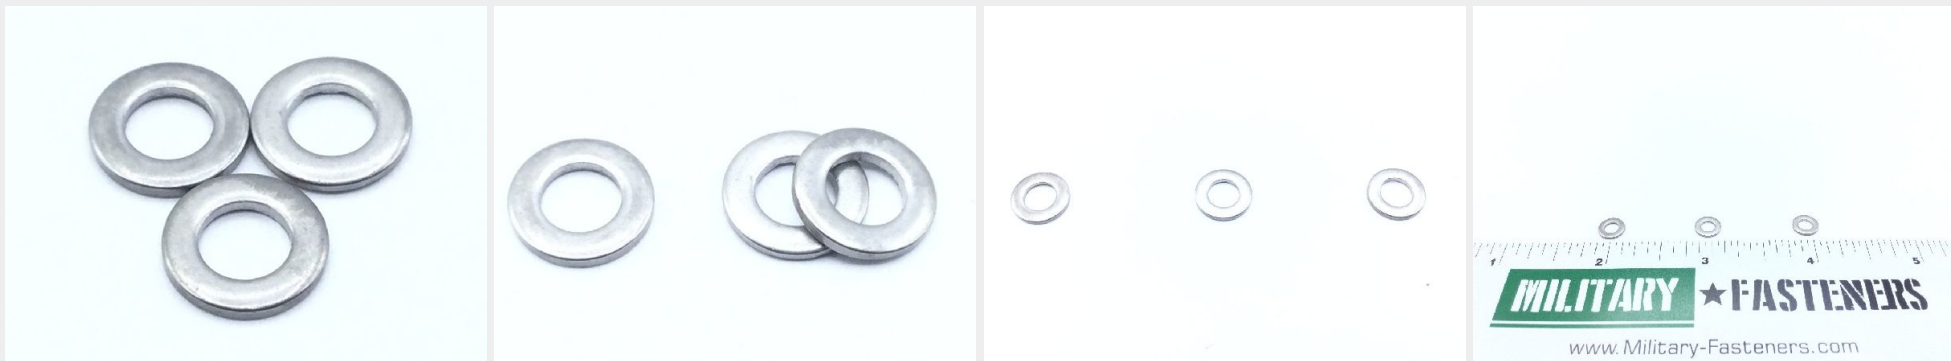

* See page 2 for technical characteristics

P/N NAS620C6 Specifications

Cross-sectional Shape Style:	Rectangular
Hole Diameter:	0.143 Inches Minimum And 0.153 Inches Maximum
Peripheral Shape Style:	Round
Center Hole Shape Style:	1 Round
Center Hole Shape Style:	Round
Thickness:	0.032 Inches Nominal
Overall Diameter:	0.262 Inches Minimum And 0.282 Inches Maximum
End Item Identification:	Mrap Rg-33
Material:	Steel Corrosion Resisting Overall
Surface Treatment:	Passivate Overall
Surface Treatment Document And Classification:	Qq-p-35 Fed Spec Single Treatment Response Overall
Specification/standard Data:	80205-nas620 Professional/Industrial Association Standard

How to Order

Order this flat washer from our inventory online by visiting <https://military-fasteners.com/washers/flat+washers/NAS620C6> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.