

## P/N NAS623-2-20

### **Description**

Fastener Length: 1-1/2", Thread: 8-32, Thread Length: 1/4", NAS623 series screw

\* Manufacturer certifications are shipped with your order FREE of charge

## Order this part online

#### **Additional Information**

SKU / Model: NAS623220


Minimum Qty (MOQ): 50

NSN: 5305-01-103-1154

Schedule B: 7318.15.6080

ECCN: EAR99

National Motor Freight: 093486, Bolts, nuts Or Screws, Noi (sub 3)

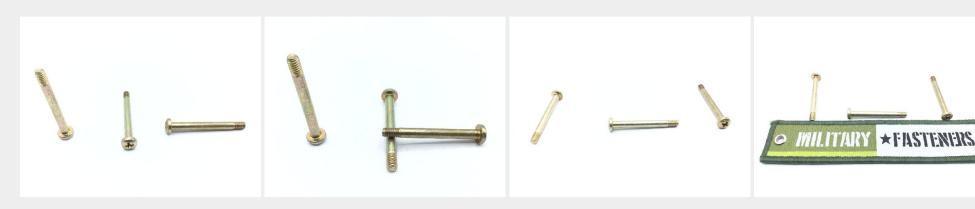

<sup>\*</sup> See page 2 for technical characteristics

# P/N NAS623-2-20 Specifications

Thread Class:	3a
Thread Direction:	Right-hand
Thread Length:	0.276 Inches Nominal
Fastener Length:	1.526 Inches Nominal
Head Style:	Pan
Head Diameter:	0.306 Inches Minimum And 0.322 Inches Maximum
Head Height:	0.105 Inches Minimum And 0.115 Inches Maximum
Internal Drive Style:	Cross Recess Type 1
Nominal Thread Diameter:	0.164 Inches
Thread Quantity Per Inch:	32
Minimum Tensile Strength:	160000 Pounds Per Square Inch
Screw Material:	Steel Comp 4140 Or Steel Comp 4340 Or Steel Comp 8740
Screw Material Document And Classification:	Mil-s-5626 Mil Spec Single Material Response Or Mil-s-5000 Mil Spec Single Material Response Or Mil-s-6049 Mil Spec Single Material Response
Screw Surface Treatment:	Cadmium
Screw Surface Treatment Document And Classification:	Qq-p-416 Ty Ii Cl 2 Fed Spec Single Treatment Response
Thread Series Designator:	Unjc
Specification/standard Data:	80205-nas623 Professional/industrial Association Standard

## **How to Order**

Order this machine screw from our inventory online by visiting <a href="https://military-fasteners.com/screws/machine+screws/NAS623-2-20">https://military-fasteners.com/screws/machine+screws/NAS623-2-20</a> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check outhere to complete your order.