



★ FASTENERS

Military-Fasteners.com

P/N NAS623-2-5

Description


length: 0.588", grip: 0.312", thread: 8-32, pan head, short thread, philips recess, cadmium plated alloy steel, NAS623 series screw

* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

Additional Information

SKU / Model:	NAS62325
Minimum Qty (MOQ):	100
NSN:	5305-01-332-5362
ECCN:	EAR99
National Motor Freight:	093486, Bolts,nuts Or Screws, Noi (sub 3)

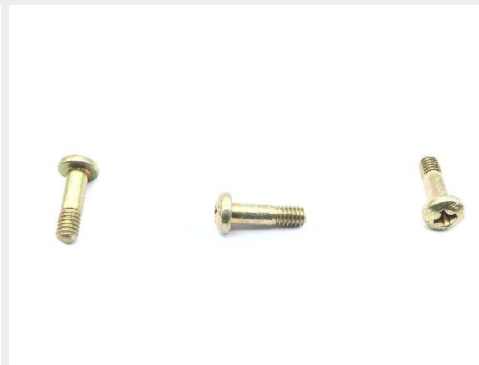

* See page 2 for technical characteristics

P/N NAS623-2-5 Specifications

Thread Class:	3a
Thread Direction:	Right-hand
Thread Length:	0.276 Inches Nominal
Fastener Length:	0.573 Inches Minimum And 0.603 Inches Maximum
Head Style:	Modified Pan
Head Diameter:	0.306 Inches Minimum And 0.322 Inches Maximum
Head Height:	0.105 Inches Minimum And 0.115 Inches Maximum
Internal Drive Style:	Cross Recess Type II
Nominal Thread Diameter:	0.1640 Inches
Thread Quantity Per Inch:	32
Screw Material:	Steel Comp 4140
Screw Material Document And Classification:	Mil-s-5626 Mil Std Single Material Response
Screw Surface Treatment:	Cadmium
Screw Surface Treatment Document And Classification:	Qq-p-416,ty II,cl 2 Fed Spec Single Treatment Response
Thread Series Designator:	Unjc
Specification/standard Data:	80205-nas623-2-5 Professional/industrial Association Standard

How to Order

Order this machine screw from our inventory online by visiting <https://military-fasteners.com/screws/machine+screws/NAS623-2-5> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.