

**Description**


Fastener Length: 1-39/64", Thread: 3/8-24, Thread Length: 19/32

\* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

**Additional Information**

SKU / Model:	NAS62616
Minimum Qty (MOQ):	2
NSN:	5306-00-543-4640
ECCN:	EAR99
National Motor Freight:	093486, Bolts,nuts Or Screws, Noi (sub 3)

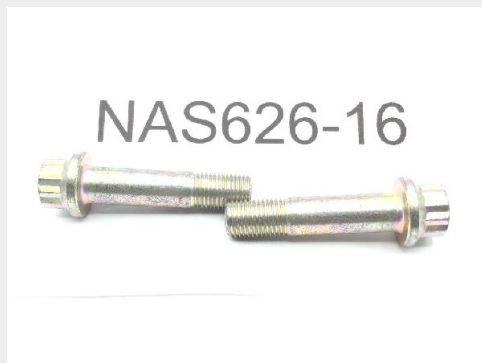

## P/N NAS626-16 Specifications

<b>Thread Class:</b>	3a
<b>Thread Direction:</b>	Right-hand
<b>Thread Length:</b>	0.594 Inches Minimum And 0.644 Inches Maximum
<b>Fastener Length:</b>	1.604 Inches Minimum And 1.634 Inches Maximum
<b>Head Style:</b>	Double Hexagon W/hole
<b>Head Height:</b>	0.378 Inches Minimum And 0.398 Inches Maximum
<b>Width Between Flats:</b>	0.430 Inches Minimum And 0.439 Inches Maximum
<b>Extended Washer Diameter:</b>	0.639 Inches Minimum And 0.649 Inches Maximum
<b>Extended Washer Thickness:</b>	0.081 Inches Minimum And 0.101 Inches Maximum
<b>Grip Diameter:</b>	0.3735 Inches Minimum And 0.3745 Inches Maximum
<b>Nominal Thread Diameter:</b>	0.375 Inches
<b>Grip Length:</b>	0.990 Inches Minimum And 1.010 Inches Maximum
<b>Thread Quantity Per Inch:</b>	24
<b>Minimum Tensile Strength:</b>	180000 Pounds Per Square Inch
<b>Hardness Rating:</b>	39.0 Rockwell C Minimum Overall And 43.0 Rockwell C Maximum Overall
<b>Material:</b>	Steel Comp 4340 Overall Or Steel Comp 4140 Overall Or Steel Comp 8740 Overall Or Steel Comp 8735 Overall Or Steel Comp 6150 Overall
<b>Surface Treatment:</b>	Cadmium Overall
<b>Surface Treatment Document And Classification:</b>	Nas 672 Assn Std Single Treatment Response Overall
<b>Thread Series Designator:</b>	Unjf
<b>Specification/standard Data:</b>	80205-nas626 Professional/industrial Association Standard

## How to Order

Order this shear bolt from our inventory online by visiting <https://military-fasteners.com/bolts/shear+bolts/NAS626-16> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.