

Description


length: 0.657", grip: 0.312", thread: 10-32, hexagon head, drilled head, tension, long thread, cadmium plated alloy steel, NAS6603 series bolt

* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

Additional Information

| | |
|-------------------------|---|
| SKU / Model: | NAS6603H5 |
| Minimum Qty (MOQ): | 10 |
| NSN: | 5306-01-053-9782 |
| Schedule B: | 7318.15.2000 |
| ECCN: | EAR99 |
| National Motor Freight: | 093486, Bolts,nuts Or Screws, Noi (sub 3) |

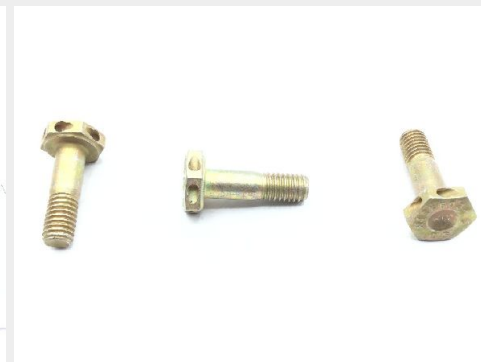

* See page 2 for technical characteristics

P/N NAS6603H5 Specifications

| | |
|---|--|
| Thread Class: | 3a |
| Thread Direction: | Right-hand |
| Thread Length: | 0.320 Inches Minimum And 0.370 Inches Maximum |
| Fastener Length: | 0.642 Inches Minimum And 0.672 Inches Maximum |
| Head Style: | Dished Hexagon |
| Head Height: | 0.110 Inches Minimum And 0.125 Inches Maximum |
| Width Between Flats: | 0.367 Inches Minimum And 0.376 Inches Maximum |
| Hole Diameter: | 0.051 Inches Nominal |
| Grip Diameter: | 0.1885 Inches Minimum And 0.1895 Inches Maximum |
| Nominal Thread Diameter: | 0.190 Inches |
| Grip Length: | 0.302 Inches Minimum And 0.322 Inches Maximum |
| Hole Quantity: | 3 |
| Hole Type: | Drilled |
| Thread Quantity Per Inch: | 32 |
| Minimum Tensile Strength: | 160000 Pounds Per Square Inch |
| Hole Configuration Style: | Hexagon Longitudinal Hole |
| Material: | Steel Comp E4340 Overall Or Steel Comp 4340 Overall Or Steel Comp 8740 Overall |
| Surface Treatment: | Cadmium Overall And Chromate Overall |
| Surface Treatment Document And Classification: | Qq-p-416,type 2,class 3 Fed Spec Single Treatment Response Overall |
| Thread Series Designator: | Unjf |

How to Order

Order this shear bolt from our inventory online by visiting <https://military-fasteners.com/bolts/shear+bolts/NAS6603H5> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.