

**Description**


length: 2.891", grip: 2.313", thread: 3/8-24, hex head, tension, long thread, cadmium plated alloy steel, NAS6606 series bolt

\* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

**Additional Information**

|                    |                  |
|--------------------|------------------|
| SKU / Model:       | NAS660637        |
| Minimum Qty (MOQ): | 5                |
| NSN:               | 5306-01-499-4978 |
| Schedule B:        | 7318.15.8085     |
| ECCN:              | EAR99            |

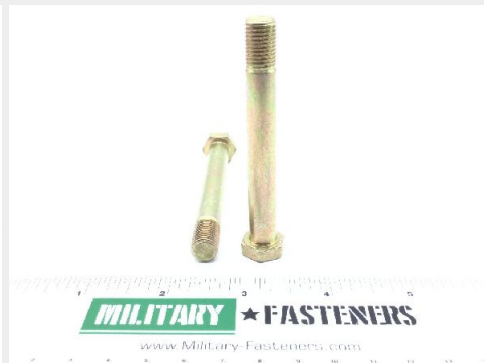

## P/N NAS6606-37 Specifications

|   |   |
|---|---|
| <b>Thread Class:</b>                                  | 3a  |
| <b>Thread Direction:</b>                              | Right-hand  |
| <b>Thread Length:</b>                                 | 0.578 Inches Nominal  |
| <b>Fastener Length:</b>                               | 2.876 Inches Minimum And 2.906 Inches Maximum   |
| <b>Head Style:</b>                                    | Dished Hexagon  |
| <b>Head Height:</b>                                   | 0.188 Inches Minimum And 0.203 Inches Maximum   |
| <b>Width Between Flats:</b>                           | 0.554 Inches Minimum And 0.564 Inches Maximum   |
| <b>Grip Diameter:</b>                                 | 0.3735 Inches Minimum And 0.3745 Inches Maximum   |
| <b>End Item Identification:</b>                       | F-22  |
| <b>Nominal Thread Diameter:</b>                       | 0.375 Inches  |
| <b>Grip Length:</b>                                   | 2.303 Inches Minimum And 2.323 Inches Maximum   |
| <b>Thread Quantity Per Inch:</b>                      | 24  |
| <b>Minimum Tensile Strength:</b>                      | 160000 Pounds Per Square Inch   |
| <b>Surface Finish:</b>                                | 32.0 Microinches Bearing Surface Of Head  |
| <b>Surface Finish:</b>                                | 32.0 Microinches Grip   |
| <b>Surface Finish:</b>                                | 32.0 Microinches Threads  |
| <b>Part Name Assigned By Controlling Agency:</b>      | Blot, Hex Head, Close Tolerance, Alloy Steel, Long Thread,non-locking   |
| <b>Material:</b>                                      | Steel Comp E4340 Overall Or Steel Comp 8740 Overall   |
| <b>Material Document And Classification:</b>          | Mil-s-5000 Mil Spec 1st Material Response Overall Or Mil-s-6049 Mil Spec 2nd Material Response Overall Or Ams 6322 Assn Std 2nd Material Response Overall |
| <b>Surface Treatment:</b>                             | Cadmium Overall And Chromate Overall  |
| <b>Surface Treatment Document And Classification:</b> | Qq-p-416,ty 2 Cl 2 Fed Spec Single Treatment Response Overall   |
| <b>Thread Series Designator:</b>                      | Unjf  |

## How to Order

Order this shear bolt from our inventory online by visiting <https://military-fasteners.com/bolts/shear+bolts/NAS6606-37> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.