

**Description**


length: 3.578", grip: 3.00", thread: 3/8-24, hex head, drilled shank, tension, long thread, cadmium plated alloy steel

\* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

**Additional Information**

SKU / Model:	NAS6606D48
Minimum Qty (MOQ):	1
NSN:	5306-01-314-1411
ECCN:	EAR99
National Motor Freight:	093486, Bolts,nuts Or Screws, Noi (sub 3)

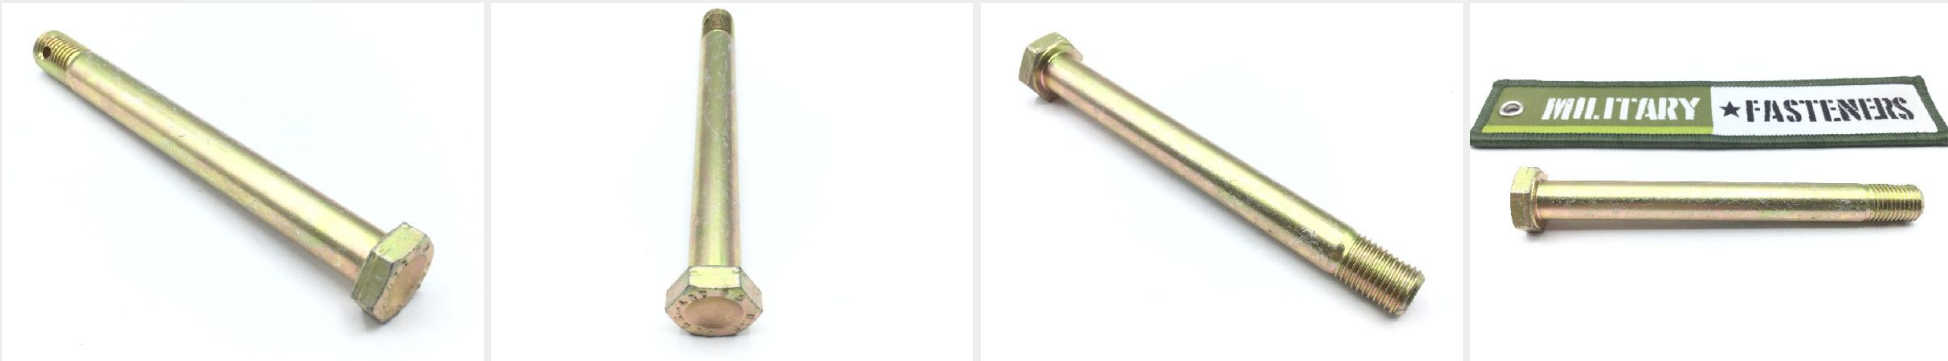

## P/N NAS6606D48 Specifications

<b>Thread Class:</b>	3a
<b>Thread Direction:</b>	Right-hand
<b>Thread Length:</b>	0.578 Inches Nominal
<b>Fastener Length:</b>	3.563 Inches Minimum And 3.593 Inches Maximum
<b>Head Style:</b>	Dished Hexagon
<b>Head Height:</b>	0.188 Inches Minimum And 0.203 Inches Maximum
<b>Width Between Flats:</b>	0.553 Inches Minimum And 0.564 Inches Maximum
<b>Grip Diameter:</b>	0.373 Inches Minimum And 0.374 Inches Maximum
<b>Nominal Thread Diameter:</b>	0.375 Inches
<b>Grip Length:</b>	2.990 Inches Minimum And 3.010 Inches Maximum
<b>Thread Quantity Per Inch:</b>	24
<b>Minimum Tensile Strength:</b>	160000 Pounds Per Square Inch
<b>Material:</b>	Steel Comp 4340 Overall Or Steel Comp 8740 Overall
<b>Material Document And Classification:</b>	Mil-s-5000 Mil Spec 1st Material Response Overall Or Mil-s-6049 Mil Spec 2nd Material Response Overall
<b>Surface Treatment:</b>	Cadmium Overall
<b>Surface Treatment Document And Classification:</b>	Qq-p-416a,ty li,cl 3 Fed Spec Single Treatment Response Overall
<b>Thread Series Designator:</b>	Unjf
<b>Specification/standard Data:</b>	80205-nas6606 Professional/Industrial Association Standard

## How to Order

Order this shear bolt from our inventory online by visiting <https://military-fasteners.com/bolts/shear+bolts/NAS6606D48> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.