

Description


Fastener Length: 1-5/32", Thread: 1/4-28, Thread Length: 27/64",

* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

Additional Information

SKU / Model:	NAS6704H5
Minimum Qty (MOQ):	5
NSN:	5306-01-519-3013
Schedule B:	7318.15.8085
ECCN:	EAR99
National Motor Freight:	093486, Bolts,nuts Or Screws, Noi (sub 3)

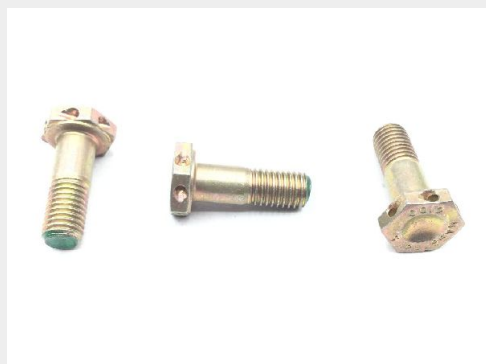

* See page 2 for technical characteristics

P/N NAS6704H5 Specifications

Thread Class:	3a
Thread Direction:	Right-hand
Thread Length:	0.425 Inches Nominal
Fastener Length:	1.162 Inches Nominal
Head Style:	Hexagon
Head Height:	0.125 Inches Nominal
Width Between Flats:	0.429 Inches Minimum And 0.439 Inches Maximum
Grip Diameter:	0.2490 Inches Minimum And 0.2495 Inches Maximum
Shank Unthreaded Hole Diameter:	0.076 Inches Nominal Overall
Nominal Thread Diameter:	0.250 Inches
Grip Length:	0.737 Inches Nominal
Thread Quantity Per Inch:	28
Distance From Head Largest Bearing Surface To Shank Hole Center:	0.984 Inches Nominal Overall
Material:	Steel Corrosion Resisting Overall
Material Document And Classification:	Amst731 Assn Std Single Material Response Overall Or Ams5732 Assn Std Single Material Response Overall Or Ams5737 Assn Std Single Material Response Overall Or Ams5853 Assn Std Single Material Response Overall
Thread Series Designator:	Unjf

How to Order

Order this shear bolt from our inventory online by visiting <https://military-fasteners.com/bolts/shear+bolts/NAS6704H5> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.