

Description


Fastener Length: 1-5/32", Thread: 1/4-28, Thread Length: 27/64",

* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

Additional Information

| | |
|-------------------------|---|
| SKU / Model: | NAS6704H5 |
| Minimum Qty (MOQ): | 5 |
| NSN: | 5306-01-519-3013 |
| Schedule B: | 7318.15.8085 |
| ECCN: | EAR99 |
| National Motor Freight: | 093486, Bolts,nuts Or Screws, Noi (sub 3) |

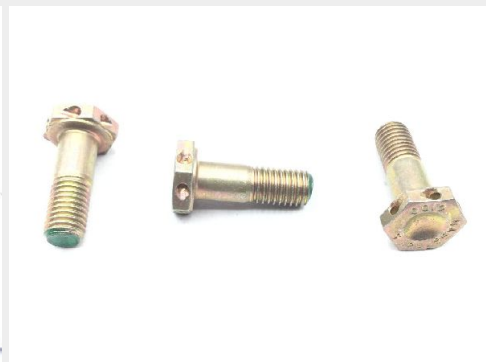

P/N NAS6704H5 Specifications

| | |
|---|--|
| Thread Class: | 3a |
| Thread Direction: | Right-hand |
| Thread Length: | 0.425 Inches Nominal |
| Fastener Length: | 1.162 Inches Nominal |
| Head Style: | Hexagon |
| Head Height: | 0.125 Inches Nominal |
| Width Between Flats: | 0.429 Inches Minimum And 0.439 Inches Maximum |
| Grip Diameter: | 0.2490 Inches Minimum And 0.2495 Inches Maximum |
| Shank Unthreaded Hole Diameter: | 0.076 Inches Nominal Overall |
| Nominal Thread Diameter: | 0.250 Inches |
| Grip Length: | 0.737 Inches Nominal |
| Thread Quantity Per Inch: | 28 |
| Distance From Head Largest Bearing Surface To Shank Hole Center: | 0.984 Inches Nominal Overall |
| Material: | Steel Corrosion Resisting Overall |
| Material Document And Classification: | Amst731 Assn Std Single Material Response Overall Or Ams5732 Assn Std Single Material Response Overall Or Ams5737 Assn Std Single Material Response Overall Or Ams5853 Assn Std Single Material Response Overall |
| Thread Series Designator: | Unjf |

How to Order

Order this shear bolt from our inventory online by visiting <https://military-fasteners.com/bolts/shear+bolts/NAS6704H5> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.