

Description


size: 1/4" length: 1/4", cadmium plated alloy steel, NAS75 series bushing

* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

Additional Information

| | |
|-------------------------|---|
| SKU / Model: | NAS754008 |
| Minimum Qty (MOQ): | 5 |
| NSN: | 3120-00-287-6991 |
| Schedule B: | 7318.29.0000 |
| ECCN: | EAR99 |
| National Motor Freight: | 114850, Bearing / Bushing O / T Ball / Roller I / S |

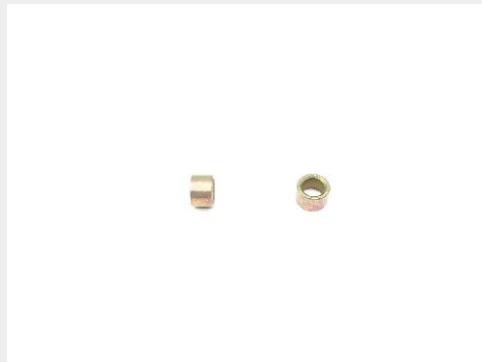

* See page 2 for technical characteristics

P/N NAS75-4-008 Specifications

| | |
|---|--|
| Overall Length: | 0.2450 Inches Minimum And 0.2500 Inches Maximum |
| Body Outside Diameter: | 0.3756 Inches Minimum And 0.3761 Inches Maximum |
| Body Inside Diameter: | 0.2500 Inches Minimum And 0.2515 Inches Maximum |
| Corner Shape: | Chamfered Inside Right Corner |
| Corner Shape: | Chamfered Inside Left Corner |
| Corner Shape: | Square Outside Left Corner |
| Corner Shape: | Square Outside Right Corner |
| Surface Finish: | 125.0 Microinches Intermediate Layer |
| Special Features: | Id And Od To Be Parallel And Concentric Within 0.0030 Tir |
| Material: | Steel Comp 4130 Overall Or Steel Comp 8630 Overall |
| Material Document And Classification: | Mil-s-6758 Mil Spec 1st Material Response Overall Or Mil-s-6050 Mil Spec 2nd Material Response Overall |
| Surface Treatment: | Cadmium Overall |
| Surface Treatment Document And Classification: | Qq-p-416,ty 2,cl 3 Fed Spec Single Treatment Response Overall |
| Style Designator: | 17c Solid, Plain, No Outside Flanges |
| Style Designator: | Solid, Plain, No Outside Flanges |
| Specification/standard Data: | 80205-nas75 Professional/industrial Association Standard |

How to Order

Order this sleeve bushing from our inventory online by visiting <https://military-fasteners.com/bushings/sleeve+bushings/NAS75-4-008> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.