

P/N NAS75-4-009

Military-Fasteners.com

Description


for bolt size: 1/4" length: 9/32", cadmium plated alloy steel, NAS75 series bushing

* Manufacturer certifications are shipped with your order $\underline{\mathsf{FREE}}$ of charge

Order this part online

Additional Information

| SKU / Model: | NAS754009 |
|-------------------------|---|
| Minimum Qty (MOQ): | 5 |
| NSN: | 3120-00-287-6992 |
| Schedule B: | 7318.29.0000 |
| ECCN: | EAR99 |
| National Motor Freight: | 114850, Bearing / Bushing O / T Ball / Roller I / S |

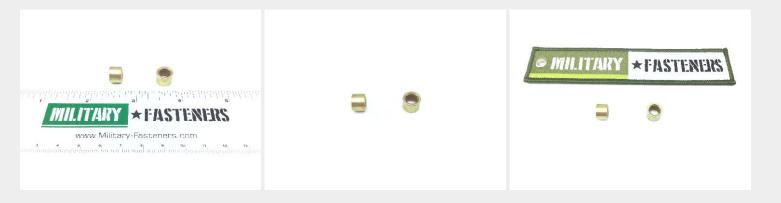

P/N NAS75-4-009 Specifications

| 0.2762 Inches Minimum And 0.2812 Inches Maximum |
|--|
| 0.3756 Inches Minimum And 0.3761 Inches Maximum |
| 0.2500 Inches Minimum And 0.2515 Inches Maximum |
| Chamfered Inside Right Corner |
| Chamfered Inside Left Corner |
| Square Outside Left Corner |
| Square Outside Right Corner |
| 125.0 Microinches Intermediate Layer |
| Id And Od To Be Parallel And Concentric Within 0.0030 Tir |
| Steel Comp 4130 Overall Or Steel Comp 8630 Overall |
| Mil-s-6758 Mil Spec 1st Material Response Overall Or Mil-s-6050 Mil Spec 2nd Material Response Overall |
| Cadmium Overall |
| Qq-p-416,ty 2,cl 3 Fed Spec Single Treatment Response Overall |
| 17c Solid, Plain, No Outside Flanges |
| Solid, Plain, No Outside Flanges |
| 80205-nas75 Professional/industrial Association Standard |
| |

How to Order

Order this sleeve bushing from our inventory online by visiting <u>https://military-fasteners.com/bushings/sleeve+bushings/NAS75-4-009</u> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out<u>here</u> to complete your order.