



★ FASTENERS

Military-Fasteners.com

P/N NAS7502-3

Description


length: 0.511", grip: 0.188", thread: 8-32, close tolerance, cadmium plated steel

* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

Additional Information

SKU / Model:	NAS75023
Minimum Qty (MOQ):	50
NSN:	5305-01-483-2828
ECCN:	EAR99
National Motor Freight:	093486, Bolts,nuts Or Screws, Noi (sub 3)

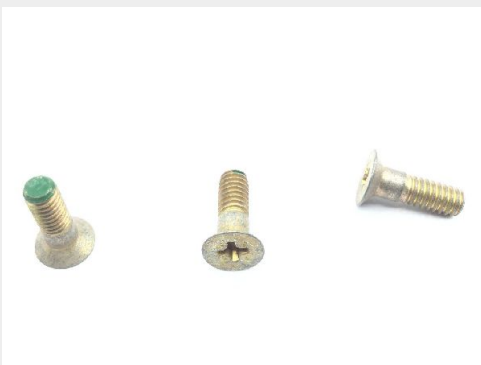

* See page 2 for technical characteristics

P/N NAS7502-3 Specifications

Thread Class:	3a
Thread Direction:	Right-hand
Thread Length:	0.323 Inches Nominal
Fastener Length:	0.424 Inches Minimum And 0.454 Inches Maximum
Head Style:	Flat Countersunk
Head Diameter:	0.331 Inches Maximum
Grip Diameter:	0.1625 Inches Minimum And 0.1635 Inches Maximum
Internal Drive Style:	Cross Recess Type Iii
Nominal Thread Diameter:	0.164 Inches
Grip Length:	0.178 Inches Minimum And 0.198 Inches Maximum
Thread Quantity Per Inch:	32
Countersink Angle:	99.0 Degrees Minimum And 101.0 Degrees Maximum
Material:	Steel Corrosion Resisting Overall
Surface Treatment:	Cadmium Overall
Thread Series Designator:	Unc

How to Order

Order this close tolerance screw from our inventory online by visiting <https://military-fasteners.com/screws/close+tolerance+screws/NAS7502-3> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.