

**Description**


Thread Qty: 32, Material: Iron, Surface Treatment: Passivate, Tensile Strength: 160000, Head Style: Flat Countersunk, NAS7503-7 Screw

\* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

**Additional Information**

SKU / Model:	NAS75037
Minimum Qty (MOQ):	25
NSN:	5305-01-425-7217
ECCN:	EAR99
National Motor Freight:	096640, Screws, Iron Or Steel

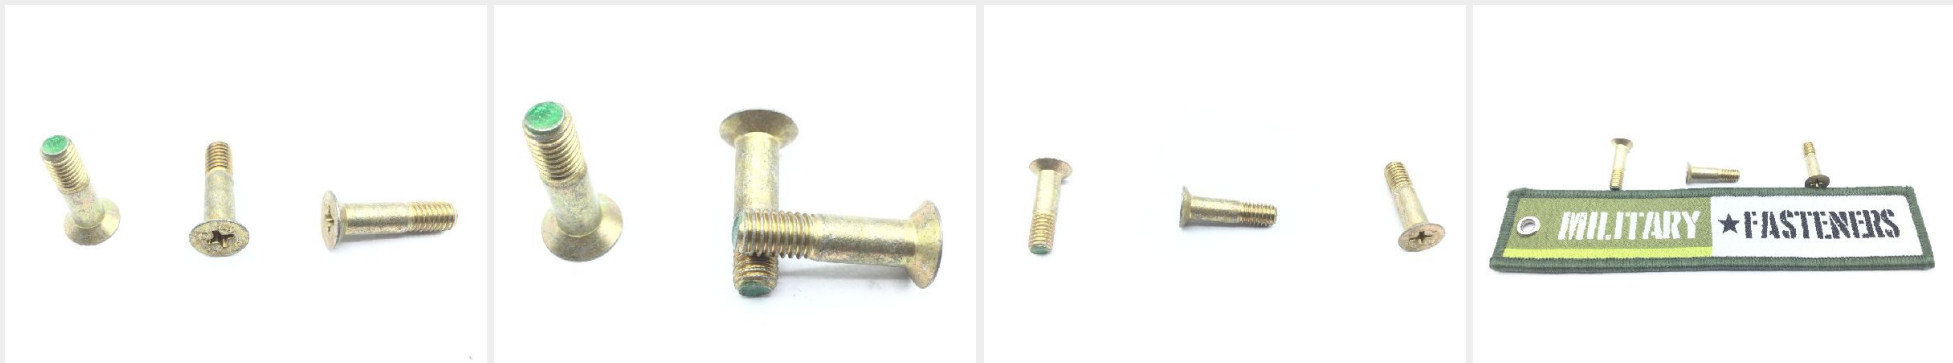

\* See page 2 for technical characteristics

## P/N NAS7503-7 Specifications

<b>Thread Class:</b>	3a
<b>Thread Direction:</b>	Right-hand
<b>Thread Length:</b>	0.323 Inches Nominal
<b>Fastener Length:</b>	0.746 Inches Minimum And 0.776 Inches Maximum
<b>Head Style:</b>	Flat Countersunk
<b>Head Diameter:</b>	0.338 Inches Minimum And 0.381 Inches Maximum
<b>Grip Diameter:</b>	0.1890 Inches Minimum And 0.1895 Inches Maximum
<b>Internal Drive Style:</b>	Cross Recess Type 1
<b>Nominal Thread Diameter:</b>	0.190 Inches
<b>Grip Length:</b>	0.428 Inches Minimum And 0.448 Inches Maximum
<b>Thread Quantity Per Inch:</b>	32
<b>Minimum Tensile Strength:</b>	160000 Pounds Per Square Inch
<b>Countersink Angle:</b>	99.0 Degrees Minimum And 101.0 Degrees Maximum
<b>Material:</b>	Iron Alloy 660 Overall
<b>Surface Treatment:</b>	Passivate Overall
<b>Thread Series Designator:</b>	Unjf
<b>Specification/standard Data:</b>	80205-nas7503 Professional/industrial Association Standard

## How to Order

Order this close tolerance screw from our inventory online by visiting <https://military-fasteners.com/screws/close+tolerance+screws/NAS7503-7> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.