



★ FASTENERS

Military-Fasteners.com

P/N NAS7702-2

Description


length: 0.448", grip: 0.125", thread: 8-32, pan head close tolerance bolt, cadmium plated alloy steel, philips recess

* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

Additional Information

SKU / Model:	NAS77022
Minimum Qty (MOQ):	100
NSN:	5305-01-324-8435
ECCN:	EAR99
National Motor Freight:	093486, Bolts,nuts Or Screws, Noi (sub 3)

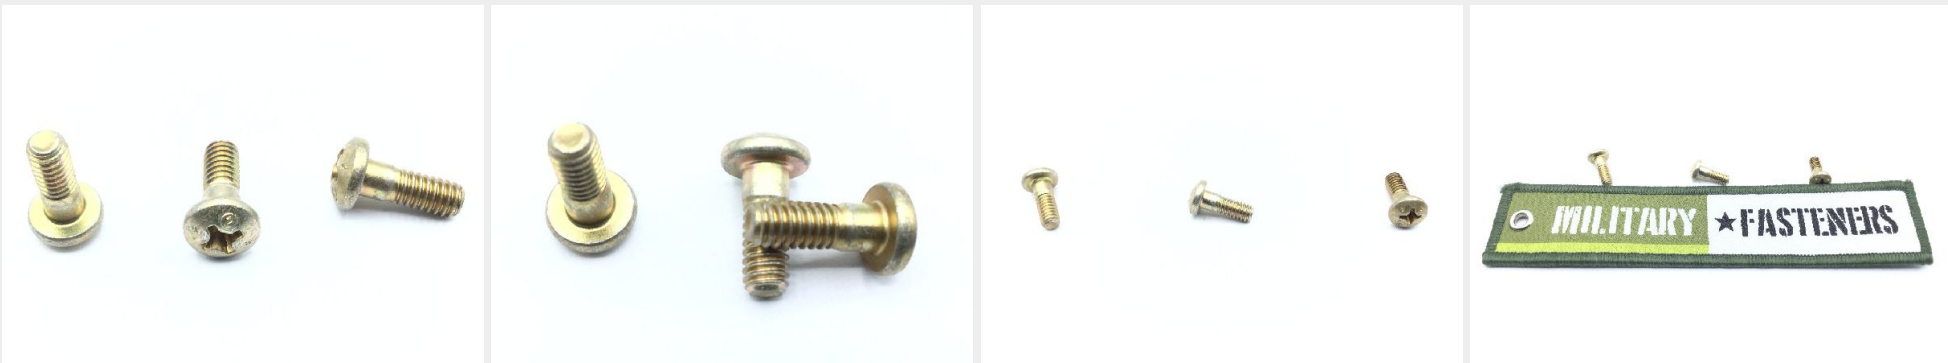

* See page 2 for technical characteristics

P/N NAS7702-2 Specifications

Thread Class:	3a
Thread Direction:	Right-hand
Thread Length:	0.323 Inches Nominal
Fastener Length:	0.433 Inches Minimum And 0.463 Inches Maximum
Head Style:	Pan
Head Diameter:	0.306 Inches Minimum And 0.322 Inches Maximum
Head Height:	0.105 Inches Minimum And 0.115 Inches Maximum
Grip Diameter:	0.1625 Inches Minimum And 0.1635 Inches Maximum
Internal Drive Style:	Cross Recess Type 1
Nominal Thread Diameter:	0.164 Inches
Grip Length:	0.115 Inches Minimum And 0.135 Inches Maximum
Thread Quantity Per Inch:	32
Minimum Tensile Strength:	160000 Pounds Per Square Inch
Material:	Steel Comp E4340 Overall Or Steel Comp 8740 Overall
Material Document And Classification:	Mil-s-5000 Mil Spec 1st Material Response Overall Or Mil-s-6049 Mil Spec 2nd Material Response Overall Or Ams 6322 Assn Std 2nd Material Response Overall
Surface Treatment:	Cadmium Overall And Chromate Overall
Surface Treatment Document And Classification:	Qq-p-416 Ty 2 Cl 2 Fed Spec Single Treatment Response Overall
Thread Series Designator:	Unjc
Specification/standard Data:	80205-nas7702 Professional/industrial Association Standard

How to Order

Order this close tolerance screw from our inventory online by visiting <https://military-fasteners.com/screws/close+tolerance+screws/NAS7702-2> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.