

**Description**


length: 0.635", grip: 0.312", thread: 10-32, pan head close tolerance, cadmium plated alloy steel, philips recess

\* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

**Additional Information**

SKU / Model:	NAS77035
Minimum Qty (MOQ):	100
NSN:	5305-01-248-3229
ECCN:	EAR99
National Motor Freight:	093486, Bolts,nuts Or Screws, Noi (sub 3)

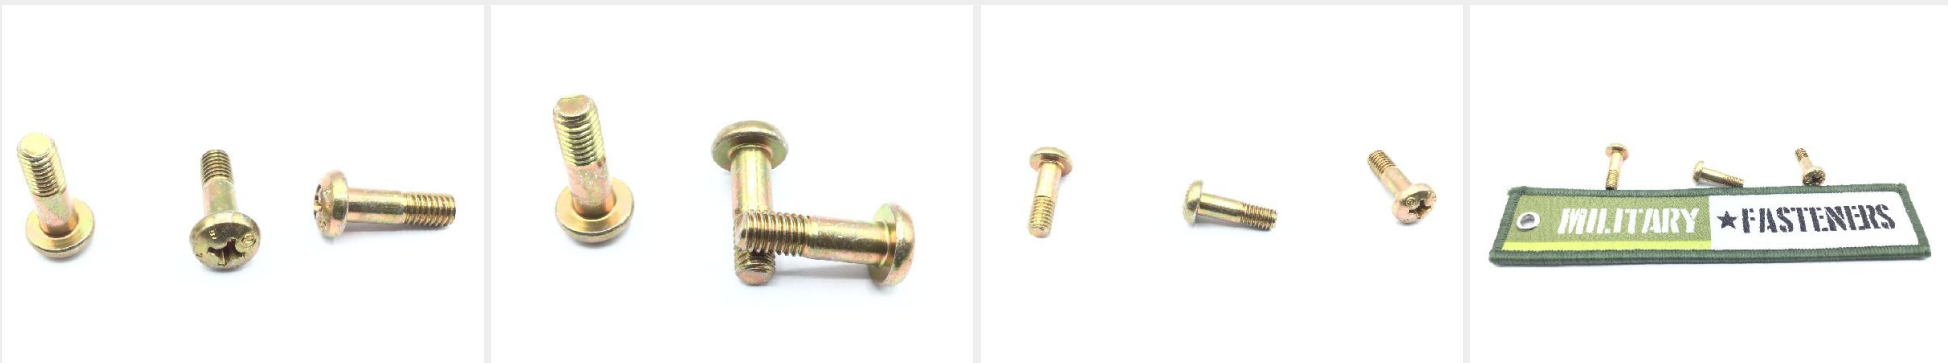

## P/N NAS7703-5 Specifications

<b>Thread Class:</b>	3a
<b>Thread Direction:</b>	Right-hand
<b>Thread Length:</b>	0.298 Inches Minimum And 0.348 Inches Maximum
<b>Fastener Length:</b>	0.620 Inches Minimum And 0.650 Inches Maximum
<b>Head Style:</b>	Pan
<b>Head Diameter:</b>	0.357 Inches Minimum And 0.373 Inches Maximum
<b>Head Height:</b>	0.122 Inches Minimum And 0.133 Inches Maximum
<b>Grip Diameter:</b>	0.1885 Inches Minimum And 0.1895 Inches Maximum
<b>Internal Drive Style:</b>	Cross Recess Type 1
<b>Nominal Thread Diameter:</b>	0.190 Inches
<b>Grip Length:</b>	0.302 Inches Minimum And 0.322 Inches Maximum
<b>Thread Quantity Per Inch:</b>	32
<b>Minimum Tensile Strength:</b>	160000 Pounds Per Square Inch
<b>Material:</b>	Steel Comp E4340 Overall Or Steel Comp 8740 Overall
<b>Material Document And Classification:</b>	Mil-s-5000 Mil Spec 1st Material Response Overall Or Mil-s-6049 Mil Spec 2nd Material Response Overall Or Ams 6322 Assn Std 2nd Material Response Overall
<b>Surface Treatment:</b>	Cadmium Overall And Chromate Overall
<b>Surface Treatment Document And Classification:</b>	Qq-p-416 Ty 2 Cl 2 Fed Spec Single Treatment Response Overall
<b>Thread Series Designator:</b>	Unjf
<b>Specification/standard Data:</b>	80205-nas7703 Professional/industrial Association Standard

## How to Order

Order this close tolerance screw from our inventory online by visiting <https://military-fasteners.com/screws/close+tolerance+screws/NAS7703-5> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.