



★ FASTENERS

Military-Fasteners.com

P/N NAS7703-6

Description


length: 0.698", grip: 0.375", thread: 10-32, pan head close tolerance bolt, cadmium plated alloy steel, philips recess

* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

Additional Information

SKU / Model:	NAS77036
Minimum Qty (MOQ):	100
NSN:	5305-01-276-8235
ECCN:	EAR99
National Motor Freight:	093486, Bolts,nuts Or Screws, Noi (sub 3)

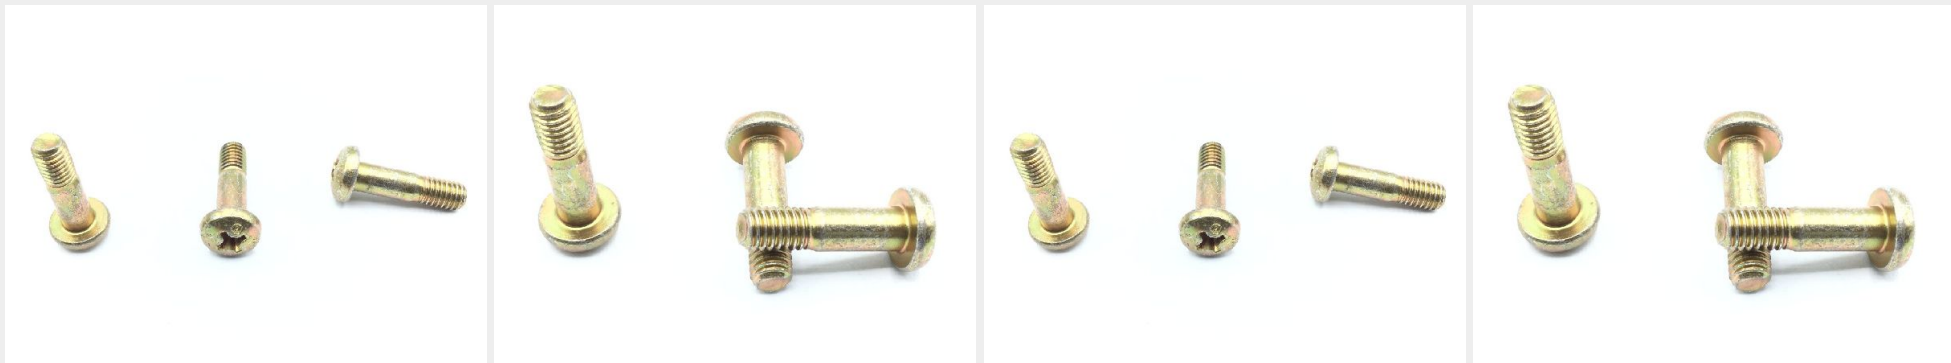

* See page 2 for technical characteristics

P/N NAS7703-6 Specifications

Thread Class:	3a
Thread Direction:	Right-hand
Thread Length:	0.298 Inches Minimum And 0.348 Inches Maximum
Fastener Length:	0.683 Inches Minimum And 0.713 Inches Maximum
Head Style:	Pan
Head Diameter:	0.357 Inches Minimum And 0.373 Inches Maximum
Head Height:	0.122 Inches Minimum And 0.133 Inches Maximum
Grip Diameter:	0.188 Inches Minimum And 0.190 Inches Maximum
Internal Drive Style:	Cross Recess Type 1
Nominal Thread Diameter:	0.190 Inches
Grip Length:	0.365 Inches Minimum And 0.385 Inches Maximum
Thread Quantity Per Inch:	32
Minimum Tensile Strength:	160000 Pounds Per Square Inch
Material:	Steel Comp 4340 Overall Or Steel Comp 8740 Overall
Surface Treatment:	Cadmium Overall And Chromate Overall
Thread Series Designator:	Unjf

How to Order

Order this close tolerance screw from our inventory online by visiting <https://military-fasteners.com/screws/close+tolerance+screws/NAS7703-6> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.