



★ FASTENERS

Military-Fasteners.com

P/N NAS7703-6

## Description


length: 0.698", grip: 0.375", thread: 10-32, pan head close tolerance bolt, cadmium plated alloy steel, philips recess

\* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

## Additional Information

SKU / Model:	NAS77036
Minimum Qty (MOQ):	100
NSN:	5305-01-276-8235
ECCN:	EAR99
National Motor Freight:	093486, Bolts,nuts Or Screws, Noi (sub 3)

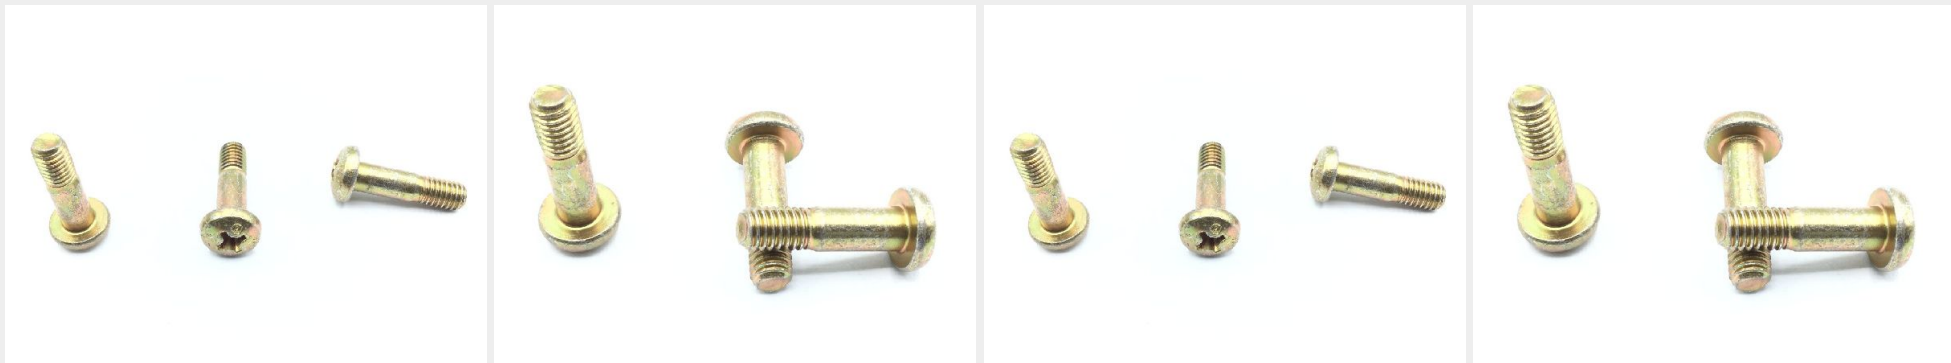

\* See page 2 for technical characteristics

## P/N NAS7703-6 Specifications

<b>Thread Class:</b>	3a
<b>Thread Direction:</b>	Right-hand
<b>Thread Length:</b>	0.298 Inches Minimum And 0.348 Inches Maximum
<b>Fastener Length:</b>	0.683 Inches Minimum And 0.713 Inches Maximum
<b>Head Style:</b>	Pan
<b>Head Diameter:</b>	0.357 Inches Minimum And 0.373 Inches Maximum
<b>Head Height:</b>	0.122 Inches Minimum And 0.133 Inches Maximum
<b>Grip Diameter:</b>	0.188 Inches Minimum And 0.190 Inches Maximum
<b>Internal Drive Style:</b>	Cross Recess Type 1
<b>Nominal Thread Diameter:</b>	0.190 Inches
<b>Grip Length:</b>	0.365 Inches Minimum And 0.385 Inches Maximum
<b>Thread Quantity Per Inch:</b>	32
<b>Minimum Tensile Strength:</b>	160000 Pounds Per Square Inch
<b>Material:</b>	Steel Comp 4340 Overall Or Steel Comp 8740 Overall
<b>Surface Treatment:</b>	Cadmium Overall And Chromate Overall
<b>Thread Series Designator:</b>	Unjf

## How to Order

Order this close tolerance screw from our inventory online by visiting <https://military-fasteners.com/screws/close+tolerance+screws/NAS7703-6> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.