



★ FASTENERS

Military-Fasteners.com

P/N NAS8602-1

Description


length: 0.385", grip: 0.062", thread: 8-32, reduced head close, tolerance, short thread, philips recess, cadmium plated alloy steel

* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

Additional Information

| | |
|-------------------------|-------------------------------|
| SKU / Model: | NAS86021 |
| Minimum Qty (MOQ): | 20 |
| NSN: | 5305-01-525-0806 |
| Schedule B: | 7318.15.2095 |
| ECCN: | EAR99 |
| National Motor Freight: | 096640, Screws, Iron Or Steel |

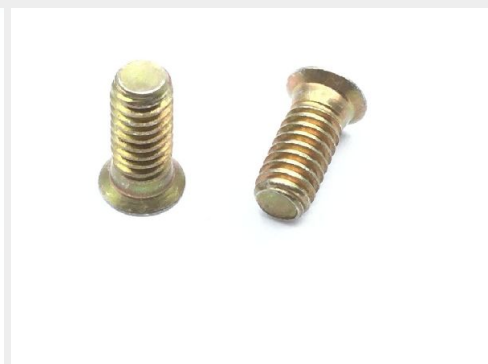

* See page 2 for technical characteristics

P/N NAS8602-1 Specifications

| | |
|--|--|
| Thread Class: | 3a |
| Thread Direction: | Right-hand |
| Thread Length: | 0.323 Inches Nominal |
| Fastener Length: | 0.370 Inches Minimum And 0.390 Inches Maximum |
| Head Style: | Flat Countersunk Undercut |
| Head Diameter: | 0.226 Inches Nominal |
| Head Height: | 0.039 Inches Nominal |
| Grip Diameter: | 0.162 Inches Minimum And 0.163 Inches Maximum |
| Internal Drive Style: | Cross Recess Type 1 |
| End Item Identification: | C17 Acft |
| Nominal Thread Diameter: | 0.164 Inches |
| Grip Length: | 0.052 Inches Minimum And 0.072 Inches Maximum |
| Thread Quantity Per Inch: | 32 |
| Countersink Angle: | 99.0 Degrees Minimum And 101.0 Degrees Maximum |
| Part Name Assigned By Controlling Agency: | Screw Close Tolerance |
| Material: | Steel Comp 4340 Overall |
| Surface Treatment: | Cadmium Overall |
| Thread Series Designator: | Unjf |

How to Order

Order this close tolerance screw from our inventory online by visiting <https://military-fasteners.com/screws/close+tolerance+screws/NAS8602-1> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.