



★ FASTENERS

Military-Fasteners.com

P/N NAS8703-7

Description


Fastener Length: 49/64", Thread: 10-32, Thread Length: 5/16

* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

Additional Information

SKU / Model:	NAS87037
Minimum Qty (MOQ):	20
NSN:	5305-01-365-7262
Schedule B:	7318.15.8085
ECCN:	EAR99
National Motor Freight:	093486, Bolts,nuts Or Screws, Noi (sub 3)

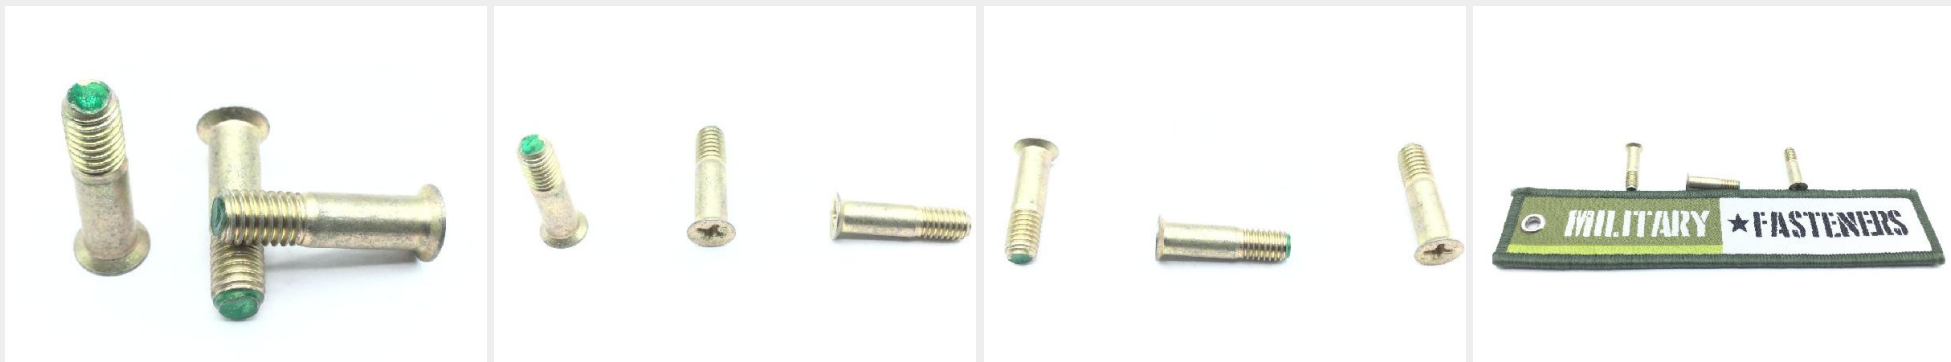

* See page 2 for technical characteristics

P/N NAS8703-7 Specifications

Thread Class:	3a
Thread Direction:	Right-hand
Thread Length:	0.323 Inches Nominal
Fastener Length:	0.746 Inches Minimum And 0.776 Inches Maximum
Head Style:	Flat Countersunk Undercut
Head Diameter:	0.266 Inches Minimum And 0.303 Inches Maximum
Head Height:	0.012 Inches Nominal
Grip Diameter:	0.1885 Inches Minimum And 0.1895 Inches Maximum
Single Shear Strength:	95000 Pounds Per Square Inch
Internal Drive Style:	Cross Recess Type 1
Nominal Thread Diameter:	0.190 Inches
Grip Length:	0.428 Inches Minimum And 0.448 Inches Maximum
Thread Quantity Per Inch:	32
Minimum Tensile Strength:	160000 Pounds Per Square Inch
Countersink Angle:	99.0 Degrees Minimum And 101.0 Degrees Maximum
Surface Finish:	32.0 Microinches Bearing Surface Of Head32.0 Microinches Grip32.0 Microinches Threads
Material:	Iron Alloy 660 Overall
Material Document And Classification:	Ams 5731 Assn Std 1st Material Response Overall Or Ams 5737 Assn Std 2nd Material Response Overall
Surface Treatment:	Cadmium Overall And Chromate Overall
Surface Treatment Document And Classification:	Qq-p-416,ty 2,cl 2 Fed Spec All Treatment Responses Overall
Thread Series Designator:	Unjf

How to Order

Order this close tolerance bolt from our inventory online by visiting <https://military-fasteners.com/bolts/close+tolerance+bolts/NAS8703-7> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.