

Description


Fastener Length: 7/8", Thread: 6-32, Thread Length: 7/8", NK526 series screw

* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

Additional Information

SKU / Model:	NK526632R14
Minimum Qty (MOQ):	10
NSN:	5305-01-008-9298
Schedule B:	7318.15.6080
ECCN:	9A991
National Motor Freight:	093486, Bolts,nuts Or Screws, Noi (sub 3)

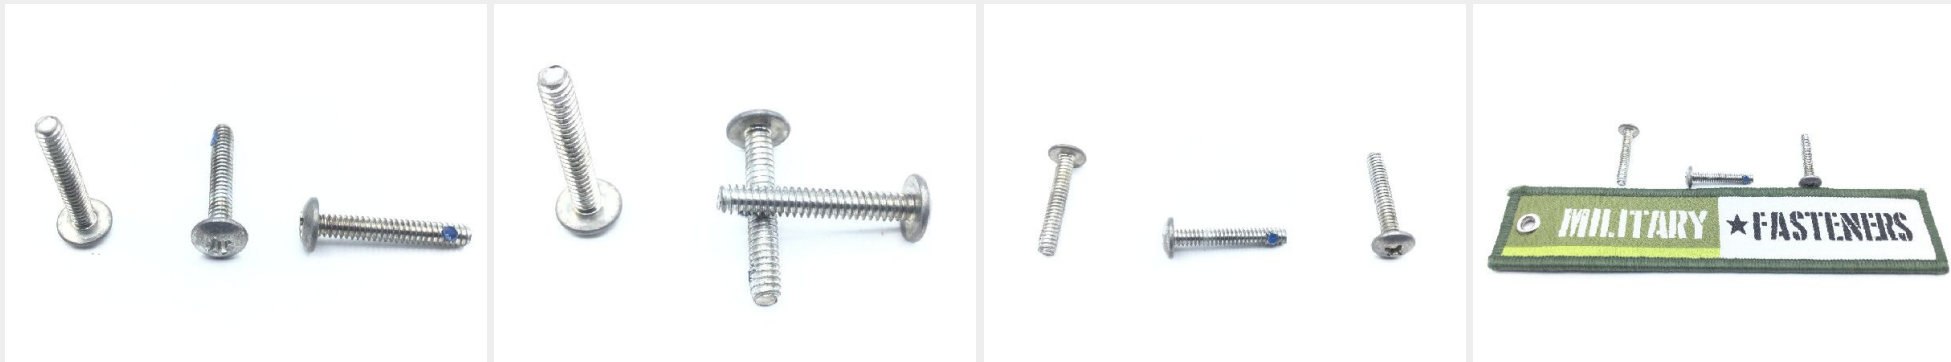

* See page 2 for technical characteristics

P/N NK526-632R14 Specifications

Thread Class:	2a
Thread Direction:	Right-hand
Thread Length:	0.875 Inches Nominal
Fastener Length:	0.875 Inches Nominal
Head Style:	Button
Head Diameter:	0.303 Inches Minimum And 0.321 Inches Maximum
Head Height:	0.086 Inches Maximum
Locking Feature:	Pellet Threads
Single Shear Strength:	246 Pounds Per Square Inch
Internal Drive Style:	Cross Recess Type li
Nominal Thread Diameter:	0.138 Inches
Thread Quantity Per Inch:	32
Minimum Tensile Strength:	55000 Pounds Per Square Inch
Material:	Steel Comp 1010 Overall
Material Document And Classification:	Qq-s-671 Fed Spec Single Material Response Overall
Surface Treatment:	Cadmium Overall
Surface Treatment Document And Classification:	Qq-p-416,ty 1,cl 3 Fed Spec Single Treatment Response Overall
Thread Series Designator:	Unc

How to Order

Order this machine screw from our inventory online by visiting <https://military-fasteners.com/screws/machine+screws/NK526-632R14> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.