

**Description**


Fastener Length: 31/64", OSB100-T series rivets

\* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

**Additional Information**

SKU / Model:	OSB100T0605
Minimum Qty (MOQ):	1
NSN:	5320-01-100-1174
Schedule B:	8108.90.3060
ECCN:	9A991
National Motor Freight:	106510, Rivets I / S Plain / Galvanized Etc

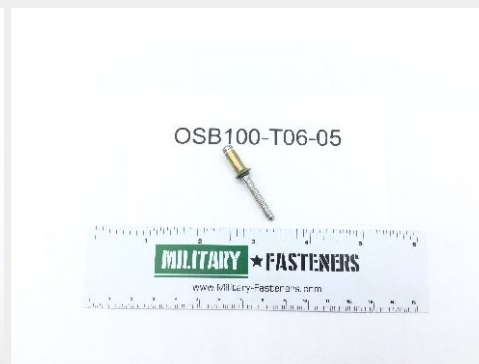

\* See page 2 for technical characteristics

## P/N OSB100-T06-05 Specifications

<b>Fastener Length:</b>	0.490 Inches Nominal
<b>Head Style:</b>	Flush (flat) Countersunk (included Angle - Less Than 135 Deg W Or W/o Chamfer)
<b>Shank Diameter:</b>	0.213 Inches Minimum And 0.215 Inches Maximum
<b>Shank Style:</b>	Self-plugging Mechanically Locked Stem
<b>Head Major Diameter:</b>	0.386 Inches Maximum
<b>Expansion Device:</b>	Serrated Stem-type W
<b>Grip Length:</b>	0.281 Inches Minimum And 0.345 Inches Maximum
<b>Countersink Angle:</b>	99.0 Degrees Minimum And 101.0 Degrees Maximum
<b>Material:</b>	Iron Alloy 660 Mechanical Lock Or Steel Mechanical Lock
<b>Material:</b>	Steel Comp 4027 Sleeve Or Steel Comp 4037 Sleeve
<b>Material:</b>	Steel Comp 8740 Stem
<b>Surface Treatment:</b>	Cadmium Overall

## How to Order

Order this blind rivet from our inventory online by visiting <https://military-fasteners.com/rivets/blind+rivets/OSB100-T06-05> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.