



★ FASTENERS

Military-Fasteners.com

P/N ST3M455-3L2-1

Description


Fastener Length: 17/32", Thread: 10-32, Thread Length: 27/64", ST3M455 series screw

* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

Additional Information

SKU / Model:	ST3M4553L21
Minimum Qty (MOQ):	10
NSN:	5305-00-316-8141
Schedule B:	7318.15.6080
ECCN:	EAR99
National Motor Freight:	093486, Bolts,nuts Or Screws, Noi (sub 3)

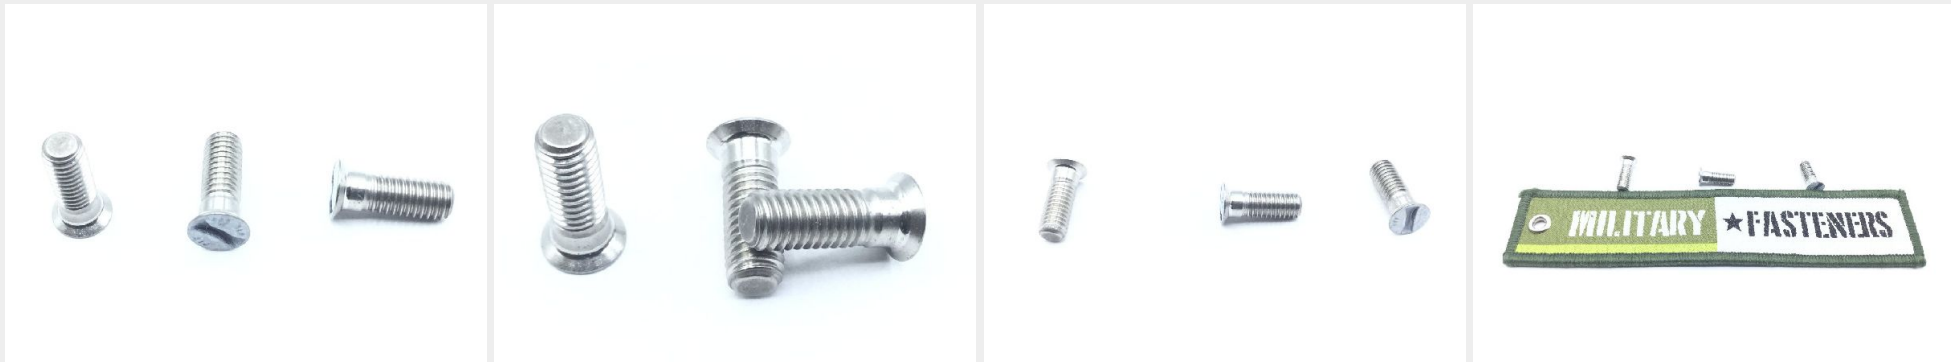

* See page 2 for technical characteristics

P/N ST3M455-3L2-1 Specifications

Thread Class:	3a
Thread Direction:	Right-hand
Thread Length:	0.381 Inches Minimum And 0.431 Inches Maximum
Fastener Length:	0.516 Inches Minimum And 0.546 Inches Maximum
Head Style:	Oval Countersunk
Head Diameter:	0.297 Inches Minimum And 0.302 Inches Maximum
Grip Diameter:	0.1890 Inches Minimum And 0.1895 Inches Maximum
Internal Drive Style:	High-torque
Nominal Thread Diameter:	0.190 Inches
Grip Length:	0.115 Inches Minimum And 0.135 Inches Maximum
Features Provided:	Dry Film Lubricant
Thread Quantity Per Inch:	32
Minimum Tensile Strength:	125000 Pounds Per Square Inch
Countersink Angle:	99.0 Degrees Minimum And 101.0 Degrees Maximum
Material:	Steel Comp Xm-13 Overall
Material Document And Classification:	Ams 5629 Assn Std Single Material Response Overall
Surface Treatment:	Passivate Overall
Surface Treatment Document And Classification:	Qq-p-35 Fed Spec Single Treatment Response Overall
Thread Series Designator:	Unjf

How to Order

Order this machine screw from our inventory online by visiting <https://military-fasteners.com/screws/machine+screws/ST3M455-3L2-1> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.